



NOTES:

- 1. SUBSTRATE MATERIAL:
N-SF11
- 2. ROHS COMPLIANT
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

S1: R(avg) ≤1.75% @ 400 - 700nm
S2: R(avg) ≤1.75% @ 400 - 700nm
S3: R(avg) ≤1.75% @ 400 - 700nm

4. FINE GROUND SURFACE

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

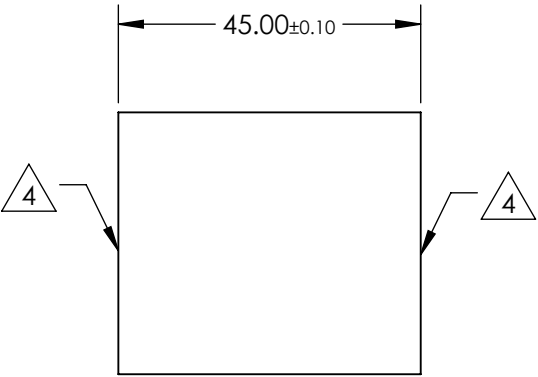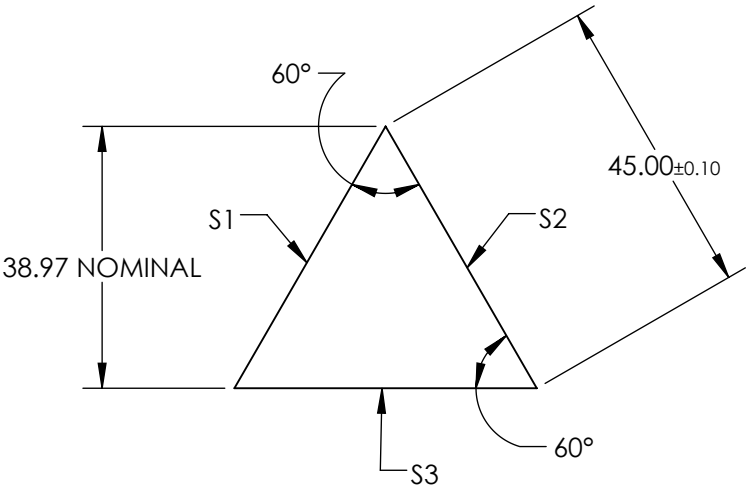

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1, S2, S3
ANGLE TOL. (arcmin)	±2
SURFACE QUALITY	40-20
SURFACE FLATNESS	λ/4
BEVEL	PROTECTIVE AS NEEDED

THIRD ANGLE
PROJECTION

ALL DIMS IN mm

 **Edmund Optics®**

TITLE	45mm N-SF11 MgF2 COATED EQUILATERAL PRISM	
DWG NO	65594	SHEET 1 OF 1