
NOTES:

- 1. SUBSTRATE: N-BK7
- 2. S2 TO BE PARALLEL WITH S1 TO <30 arcsec
- 3. COATING (APPLY ACROSS CLEAR APERTURE) S1 & S2: RAVG ≤1.75% @ 400 - 700nm
- 4. FINE GRIND SURFACE
- 5. ROHS COMPLIANT

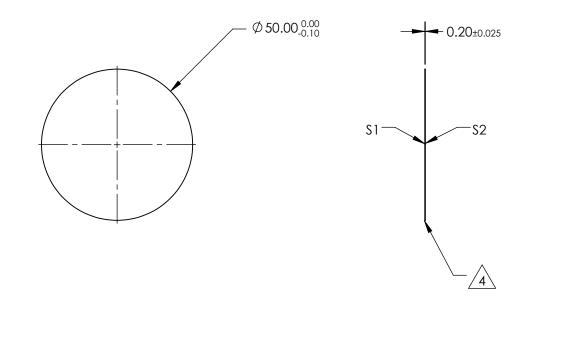

FOR INFORMATION DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

S1 S2				ED [®] Edmund Optics [®]			
SHAPE	PLANO	PLANO				50mm DIAMETER, MGF2 COATED, ULTR	20-
SURFACE QUALITY	40-20	40-20			TITLE	THIN N-BK7 WINDOW	
WAVELENGTH RANGE	400 - 700nm	400 - 700nm					CLIEFT
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	66199	SHEET 1 OF 1