

NOTES:



1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS 0°

R(avg) ≤0.4% @ 425 - 675nm


3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

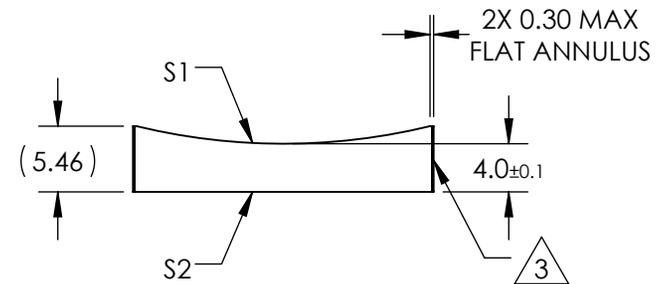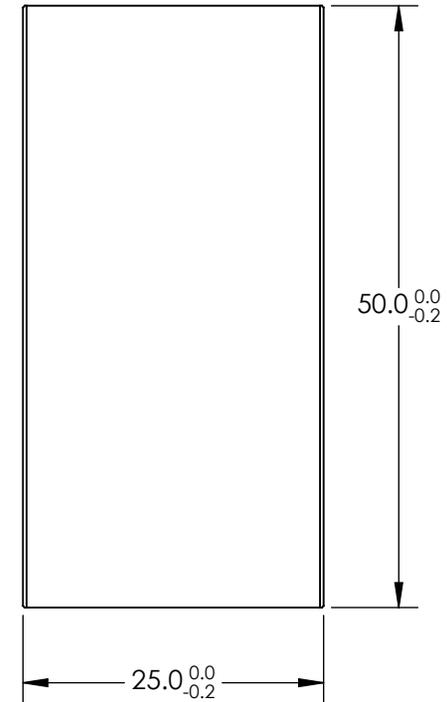

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	-100	 Edmund Optics®		
SHAPE	CONVEX	PLANO	BFL	-102.64			
RADIUS	51.68	∞	THIRD ANGLE PROJECTION 				
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00	TITLE 25mm H X 50mm L X -100mm FL VIS 0° COATED, CYLINDER LENS				
COATING APERTURE	24.00 X 49.00	24.00 X 49.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	69809	SHEET 1 OF 1