## NOTES:

1. SUBSTRATE:

LOW DISPERSION POLYMER

2. ABBE NUMBER(Vd): 100

3. COATING: BBAR (400 - 700nm)


4. FOCUS RANGE: -1.5 to +3.5 DIOPTER

5. TRANSMITTED WAVEFRONT ERROR, RMS:

VERTICAL: 0.15λ @ 525nm HORIZONTAL: 0.25λ @ 525nm


6. DAMAGE THRESHOLD, CW: 10 kW/cm<sup>2</sup> @ 1064nm

7. ROHS COMPLIANT

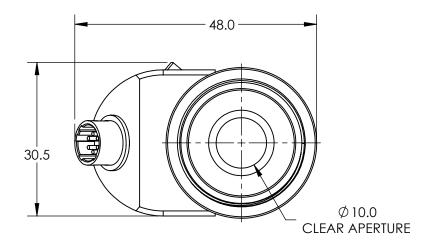

FOR INFORMATION ONLY:

PARTS TO THIS DRAWING



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY



THIRD ANGLE PROJECTION	$\phi$	TITLE	-1.5 TO +3.5 DIOPTERS, VIS COATED, FO TUNABLE LENS	OCUS
ALL DIMS IN	mm	DWG NO	88939	SHEET 1 OF 1

