

NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLY ACROSS CLEAR APERTURE): S1: BARE ALUMINUM S2: NONE
- 3. WAVELENGTH RANGE: 400-700nm ABSOLUTE DIFFRACTION EFFICIENCY: 45-65% GROOVE DENSITY: 1200 grooves/mm





5. Rohs Compliant

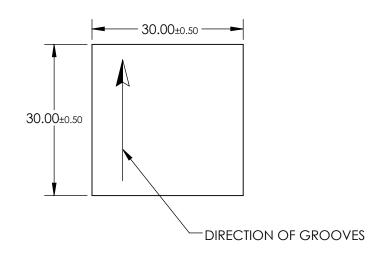



FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	Edmund Optics®
	OD 4 TIME HELD 1000 OD 1/10 00 1/ 00

	\$1	S2 THIRD ANGLE PROJECTION		TITLE	GRATING HOLO 1200GR VIS 30 X 30		
SHAPE	PLANO	PLANO					CUEET
CLEAR APERTURE	27.0 x 27.0	N/A	ALL DIMS IN	mm	DWG NO	55264	SHEET 1 OF 1