


FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING



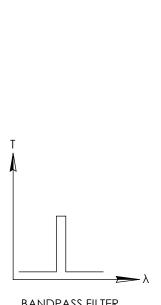

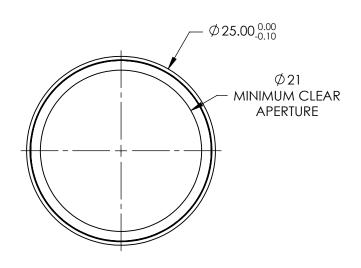

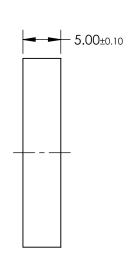

R	4 1	(ID	D A	22		ITFR	,
\Box	Αı	VII.) P P	11	ГΙ		

REV. A	VALUE		
CENTER WAVELENGTH (CWL)	532nm ±1nm		
FULL WIDTH HALF MAX (FWHM)	5.0 ±1nm		
MINIMUM TRANSMISSION	≥85%		
BLOCKING	200 - 1200nm		
SURFACE QUALITY	80-50		
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING		
COATING TYPE	HARD COATED		
DURABILITY	MIL-C-48497a, SEC 3.4.1		
ENVIRONMENTAL	MIL-STD-810F, SEC 507.4		

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	Edmund Optics®
1	532nm CWI 25mm Dia Hard Coated OD4

G	THIRD ANGLE _ PROJECTION		TITLE	532nm CWL, 25mm Dia., Hard Coated 5nm Bandpass Filter	OD4
	ALL DIMS IN	mm	DWG NO	39356	SHEET 1 OF 1