

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

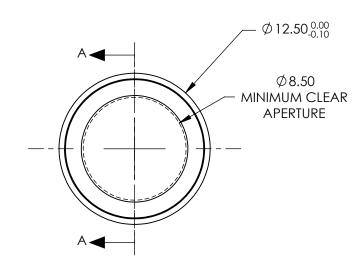

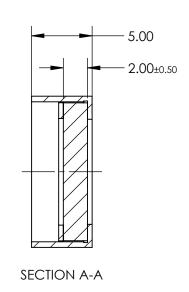

SPECIFICATION	VALUE
CENTER WAVELENGTH (CWL)	300nm ±5 nm
FULL WIDTH HALF MAX (FWHM)	50nm ±5 nm
MINIMUM TRANSMISSION	≥60 %
BLOCKING	≥4.0 FROM 200 - 1200 nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	Hard Coated

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

Edmound Ontion

_			Eamuna Opi				
	THIRD ANGLE PROJECTION	\rightarrow	TITLE	300nm CWL, 12.5mm Dia. Hard Coated 50nm Bandpass Filter	OD 4		
	ALL DIMS IN	mm	DWG NO	12088	SHEET 1 OF 1		