
- 1. SUBSTRATE
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO <10 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) METALLIC ND
- 4. FINE GROUND SURFACE
- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT






REV. A	S1	\$2			Edmund Optic	C ®
Shape	PLANO	PLANO				5
SURFACE QUALITY	60-40	60-40				
CLEAR APERTURE	Ø22.5	Ø22.5	THIRD ANGLE	TITLE	OD 0.3, Ø25mm, IR NEUTRAL DENSITY FILTER	
COATING APERTURE	Ø10.00	N/A				CLIEFT
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN mm	DWG NO	64353	Sheet 1 of 1

- 1. SUBSTRATE
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO <10 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) METALLIC ND
- 4. FINE GROUND SURFACE
- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT

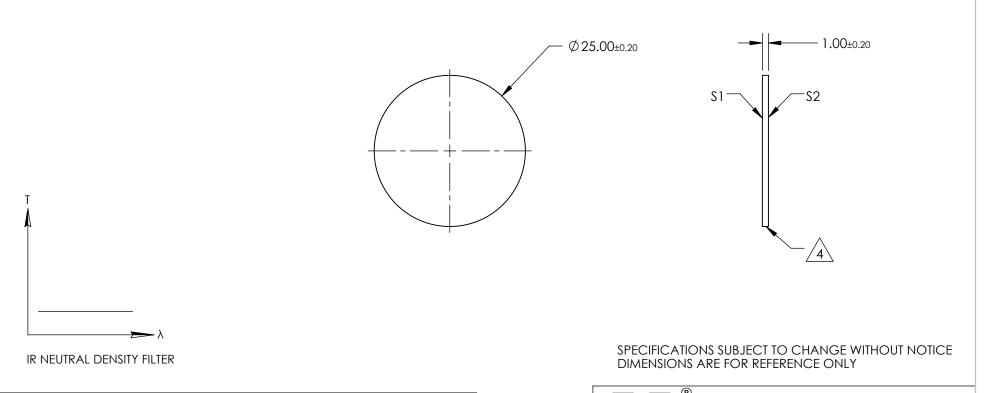


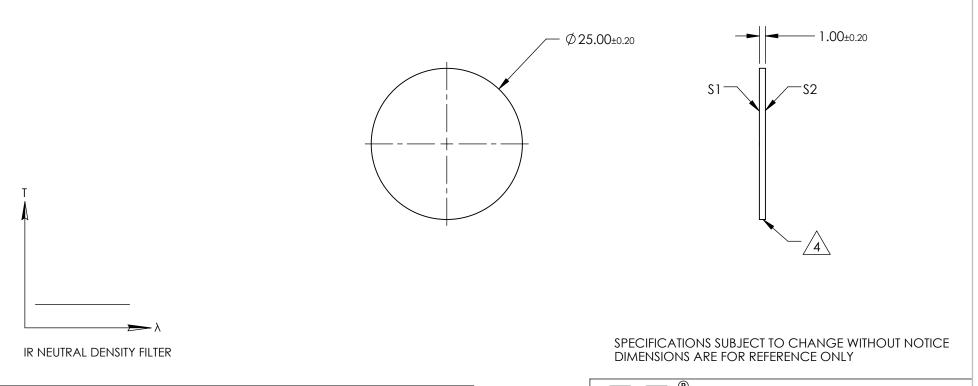

REV. A	S1	\$2]		Edmund Optic	C ®
Shape	PLANO	PLANO				5
SURFACE QUALITY	60-40	60-40				
CLEAR APERTURE	Ø22.5	Ø22.5	THIRD ANGLE	TITLE	OD 0.5 , Ø25mm, IR NEUTRAL DENSITY FILTER	
COATING APERTURE	Ø10.00	N/A				CUEFT
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN mm	DWG NO	64354	Sheet 1 OF 1

- 1. SUBSTRATE
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO <10 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) METALLIC ND
- 4. FINE GROUND SURFACE
- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT




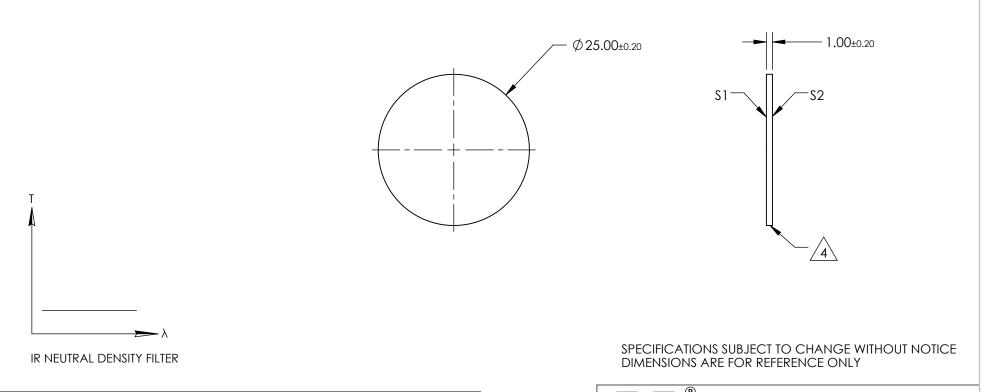

REV. A	S1	\$2]		[®] Edmund Optics [®]	
SHAPE	PLANO	PLANO				
SURFACE QUALITY	60-40	60-40				
CLEAR APERTURE	Ø22.5	Ø22.5		TITLE	OD 1 , Ø25mm, IR NEUTRAL DENSITY FILTER	
COATING APERTURE	Ø10.00	N/A				_
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN mm	DWG NO	64355 SHEET 1 OF 1	

- 1. SUBSTRATE
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO <10 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) METALLIC ND
- 4. FINE GROUND SURFACE
- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT




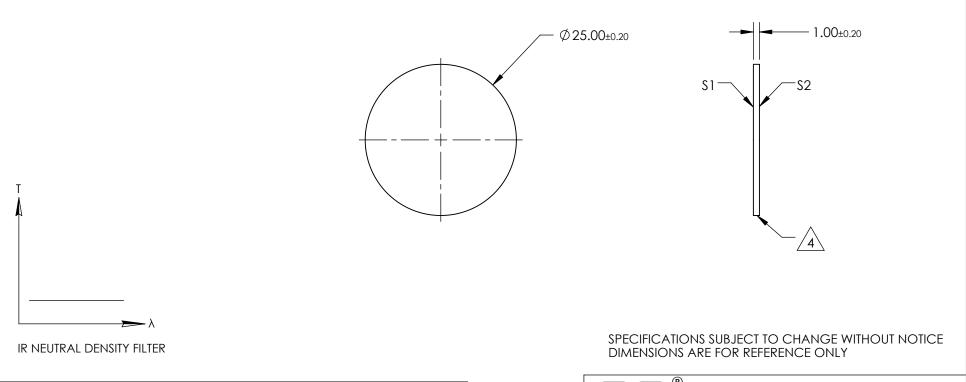

REV. A	S1	\$2]		[®] Edmund Optics [®]	
SHAPE	PLANO	PLANO				
SURFACE QUALITY	60-40	60-40				
CLEAR APERTURE	Ø22.5	Ø22.5		TITLE	OD 2 , Ø25mm, IR NEUTRAL DENSITY FILTER	
COATING APERTURE	Ø10.00	N/A				_
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN mm	DWG NO	64356 SHEET 1 OF	

- 1. SUBSTRATE
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO <10 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) METALLIC ND
- 4. FINE GROUND SURFACE
- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT




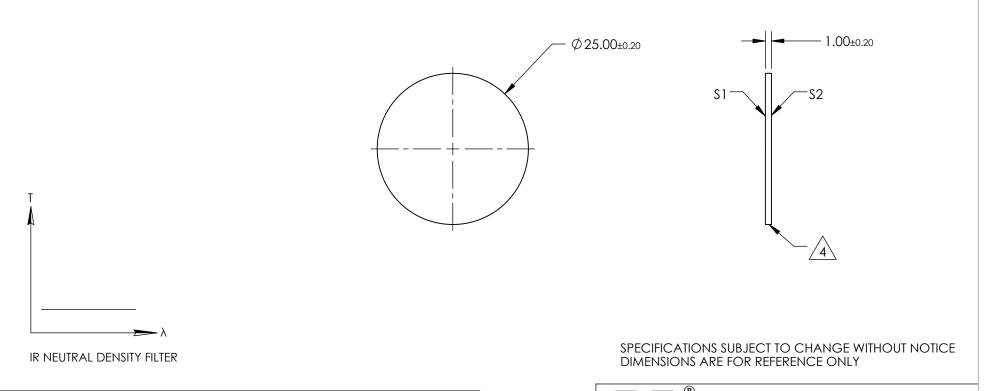

REV. A	S1	\$2			Edmund Optic	C ®
SHAPE	PLANO	PLANO				<i>,</i> 3
SURFACE QUALITY	60-40	60-40				
CLEAR APERTURE	Ø22.5	Ø22.5		TITLE	OD 3 , Ø25mm, IR NEUTRAL DENSITY FILTE	ER
COATING APERTURE	Ø10.00	N/A				0.1557
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN mm	DWG NO	64357	SHEET 1 OF 1

- 1. SUBSTRATE
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO <10 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) METALLIC ND
- 4. FINE GROUND SURFACE
- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT




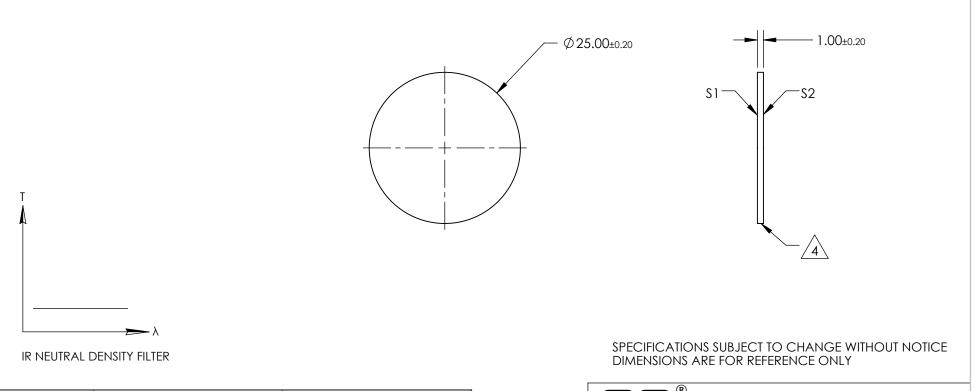

REV. A	S1	\$2				Edmund Optic	C ®
SHAPE	PLANO	PLANO					,J
SURFACE QUALITY	60-40	60-40		1			
CLEAR APERTURE	Ø22.5	Ø22.5	THIRD ANGLE. PROJECTION			OD 0.6, Ø25mm, IR NEUTRAL DENSITY FILTER	
COATING APERTURE	Ø10.00	N/A		1			CLIEFT
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	87197	Sheet 1 Of 1

- 1. SUBSTRATE
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO <10 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) METALLIC ND
- 4. FINE GROUND SURFACE
- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT




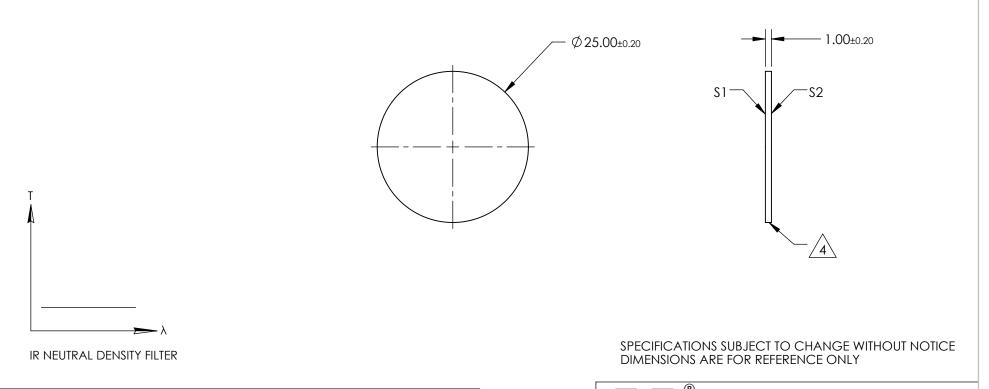

REV. A	S1	\$2]			Edmund Optic	C ®
SHAPE	PLANO	PLANO					5
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	Ø22.5	Ø22.5			TITLE	OD 0.9, Ø25mm, IR NEUTRAL DENSITY FILTER	
COATING APERTURE	Ø10.00	N/A		1			CUEFT
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	87198	Sheet 1 Of 1

- 1. SUBSTRATE
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO <10 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) METALLIC ND
- 4. FINE GROUND SURFACE
- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT




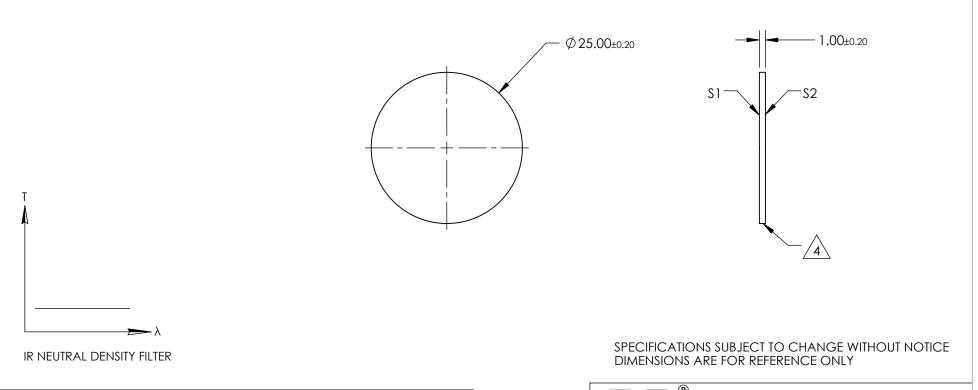

REV. A	S1	\$2				Edmund Optic	C ®
SHAPE	PLANO	PLANO					<i>,</i> 3
SURFACE QUALITY	60-40	60-40		1			
CLEAR APERTURE	Ø22.5	Ø22.5	THIRD ANGLE PROJECTION	THIRD ANGLE		OD 1.3, Ø25mm, IR NEUTRAL DENSITY FILTER	
COATING APERTURE	Ø10.00	N/A					CUEFT
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	87199	SHEET 1 OF 1

- 1. SUBSTRATE
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO <10 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) METALLIC ND
- 4. FINE GROUND SURFACE
- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 6. ROHS COMPLIANT



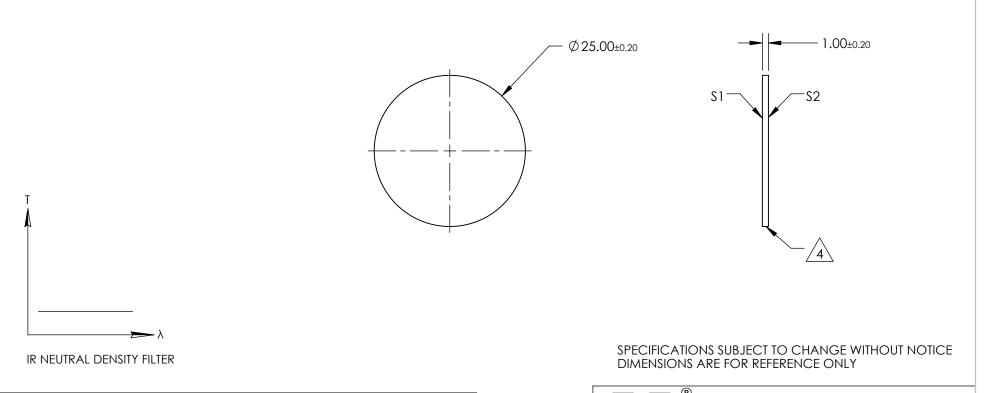

REV. A	S1	\$2]			Edmund Optic	C ®
Shape	PLANO	PLANO					5
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	Ø22.5	Ø22.5	THIRD ANGLE PROJECTION	THIRD ANGLE		OD 1.5 , Ø25mm, IR NEUTRAL DENSITY FILTER	
COATING APERTURE	Ø10.00	N/A		1			CULET
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	87200	SHEET 1 OF 1