
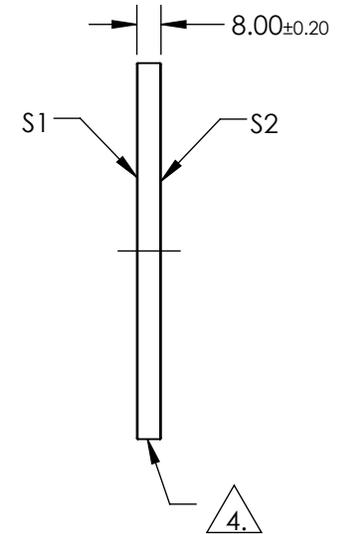
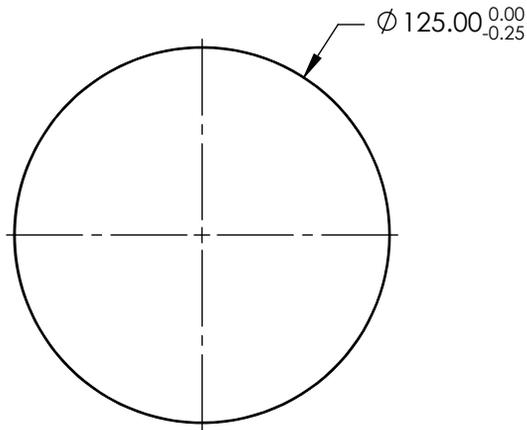


NOTES:

1. SUBSTRATE:
N-BK7
2. S2 TO BE PARALLEL TO S1 TO WITHIN <1 ARCMIN
3. COATING (APPLY ACROSS COATING APERTURE)
S1 & S2: VIS 0° (425-675nm)
R(AVG) ≤0.4% @ 425 - 675nm
4. FINE GRIND SURFACE
5. ROHS COMPLIANT



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY



	S1	S2					TITLE 125mm DIA., 8mm THICK, VIS 0° COATED λ/4 N-BK7 WINDOW	
SHAPE	PLANO	PLANO						
SURFACE QUALITY	60-40	60-40	ALL DIMS IN mm	DWG NO 17299	SHEET 1 OF 1			
WAVELENGTH RANGE	425 - 675 nm	425 - 675 nm						
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED						