
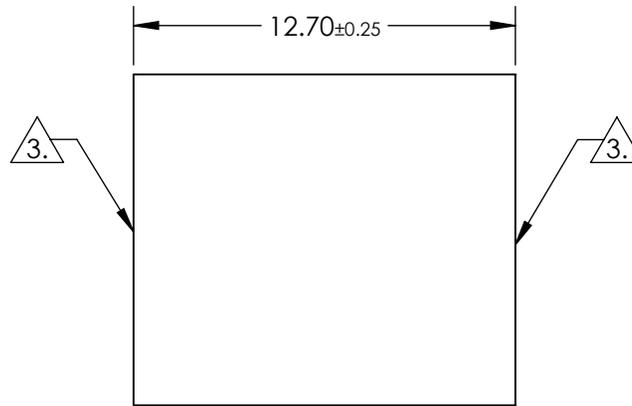
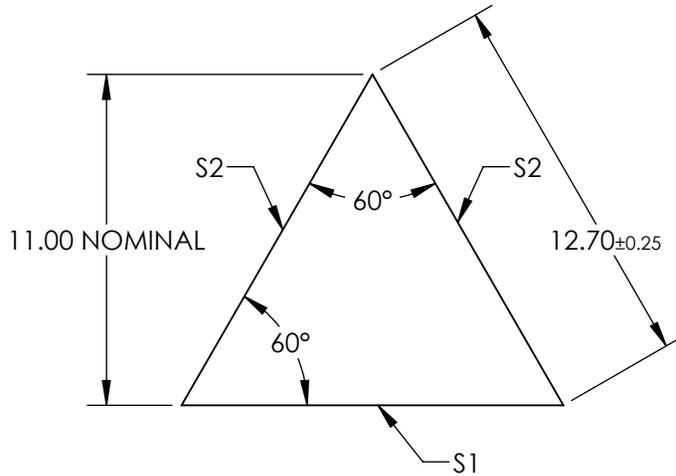


NOTES:

- 1. SUBSTRATE: Calcium Fluoride (CaF<sub>2</sub>)
- 2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: Uncoated


3. FINE GRIND SURFACE

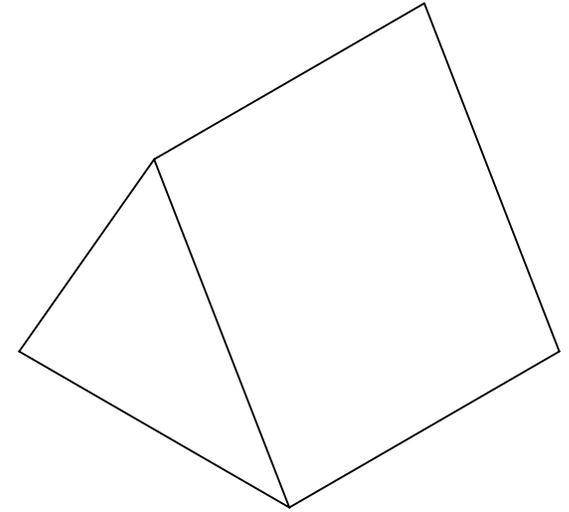

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
CLEAR APERTURE	85%	85%
ANGLE TOL. (arcmin)	±10	±10
SURFACE QUALITY	40-20	40-20
SURFACE FLATNESS	2λ	2λ
WAVELENGTH RANGE (nm)	200 - 7000	200 - 7000
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

**EO**® Edmund Optics®

TITLE: 12.7mm, Calcium Fluoride Equilateral Prism

DWG NO: 19709

SHEET 1 OF 1