

1. SUBSTRATE:
ZERODUR®

3. COATING (APPLY ACROSS CLEAR APERTURE)

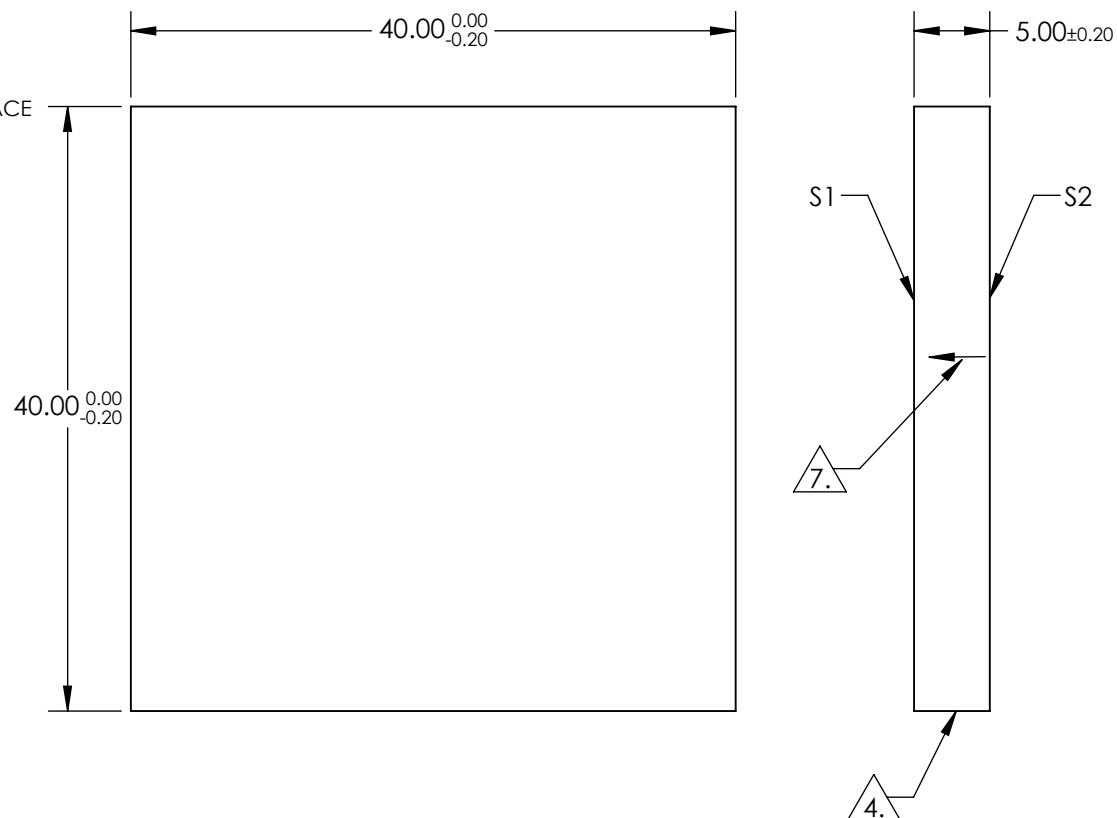
S1: Protected Silver (450-10000nm)
R(AVG) >98% @ 450 - 2000nm
R(AVG) >98% @ 2000 - 10,000nm
S2: NONE

4. FINE GRIND SURFACE (ADD INK NOTE AS NEEDED)

6. SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE



7. ARROW ON EDGE POINTS TOWARDS 1/10TH WAVE SURFACE S1

8. ROHS COMPLIANT



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	 Edmund Optics®				
SHAPE	PLANO	PLANO	<div>THIRD ANGLE PROJECTION</div> 		TITLE	40 x 40mm Protected Silver Coated, $\lambda/10$ ZERODUR® Mirror	
SURFACE QUALITY	20-10	COMMERCIAL POLISH					
SURFACE FLATNESS	$\lambda/10$	N/A					
CLEAR APERTURE	36.00 x 36.00	N/A					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	17786	SHEET 1 OF 1