


- NOTES:
- 1. COATING (APPLY ACROSS CLEAR APERTURE):
LASER V-COAT (1064nm)
R(ABS) <0.25% @ 1064nm
 - 2. ROHS COMPLIANT

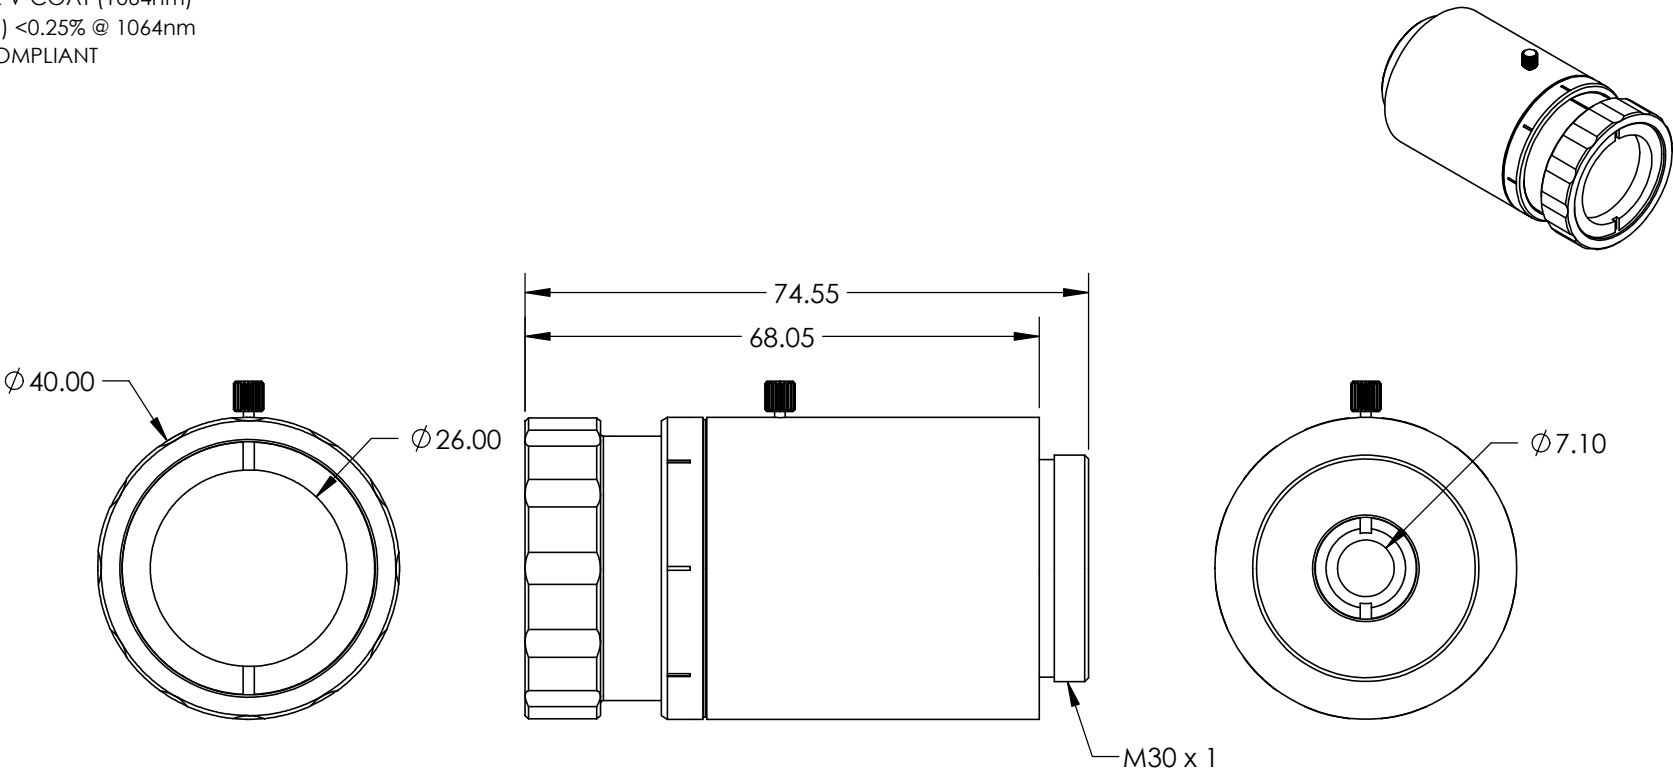

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

DAMAGE THRESHOLD (PULSED)	10 J/cm2 @ 1064nm, 10ns, 20Hz
DESIGN WAVELENGTH DWL (nm)	1064
EXPANSION POWER	4X
TRANSMISSION (%)	>99 (NOMINAL)
NOMINAL PERFORMANCE	$\lambda/10$ FOR 4.0mm INPUT BEAM (NOMINAL, λ = DWL)

THIRD ANGLE PROJECTION	
ALL DIMS IN	mm

EO® Edmund Optics®

TITLE	4X, 1064nm Vega® Nd:YAG Laser Line Beam Expander		
DWG NO	19404	SHEET 1 OF 1	