NOTES:


1. SUBSTRATE:

FUSED SILICA

2. SURFACE S2 TO BE PARALELL TO SURFACE S1 TO WITHIN <5 ARCSEC

3. COATING (APPLY ACROSS CLEAR APERTURE)

Rabs ≤1.0% @ 250 - 425nm Ravg ≤0.75% @ 250 - 425nm Ravg ≤0.5% @ 370 - 420nm

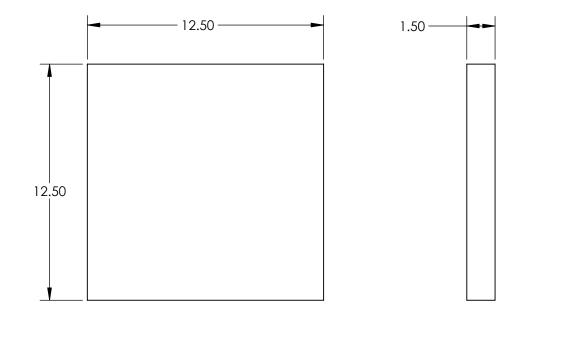

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

| SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY | | | | | | Edmund Opti | CC ® |
|--|---------------------|---------------------|-------------|----|--------|---|------------------|
| | S1 | \$2 | | | | | 63 |
| SHAPE | PLANO | PLANO | | | TITLE | 12.5mm Sq., 1.5mm Thick, UV-AR Coated λ/10 Fused Silica Window | |
| SURFACE QUALITY | 20-10 | 20-10 | | | | | |
| CLEAR APERTURE | 11.25 x 11.25 | 11.25 x 11.25 | | | | | |
| BEVEL | PROTECTED AS NEEDED | PROTECTED AS NEEDED | ALL DIMS IN | mm | DWG NO | 24296 | SHEET 1 OF 24 |