NOTES:


1. SUBSTRATE:

FUSED SILICA

2. SURFACE S2 TO BE PARALELL TO SURFACE S1 TO WITHIN <5 ARCSEC

3. COATING (APPLY ACROSS CLEAR APERTURE)

Ravg <0.5% @ 350 - 700nm

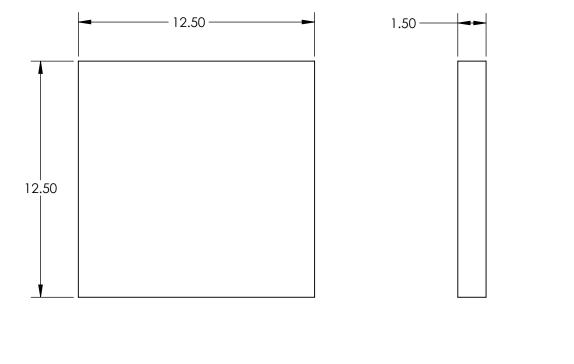

## R INFORMA О DO NOT MANUFACTURE PARTS TO THIS DRAWING

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY					Edmund Optic	<b>N</b> C®
	S1	S2				, <b>5</b> °
SHAPE	PLANO	PLANO	THIRD ANGLE PROJECTION	TITLE DWG NO	12.5mm Sq., 1.5mm Thick, VIS-EXT Coated λ/10 Fused Silica Window	
SURFACE QUALITY	20-10	20-10				
CLEAR APERTURE	11.25 x 11.25	11.25 x 11.25				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED			24301	SHEET 6 OF 24