
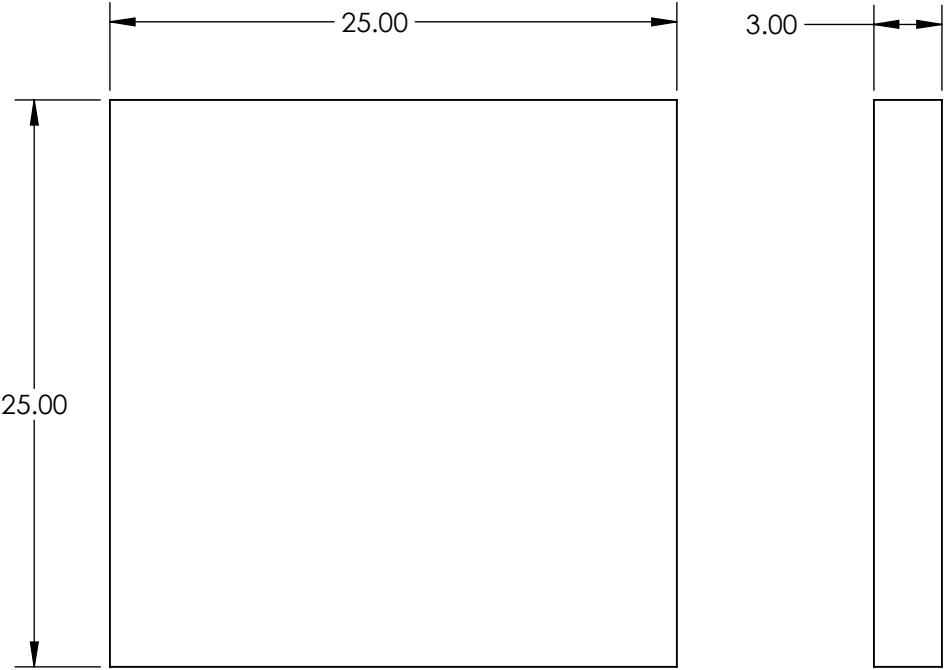


NOTES:

- 1. SUBSTRATE:
FUSED SILICA
- 2. SURFACE S2 TO BE PARALELL TO SURFACE S1 TO WITHIN <5 ARCSEC
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

Rabs ≤1.5% @ 750 - 800nm
Rabs ≤1.0% @ 800 - 1550nm
Ravg ≤0.7% @ 750 - 1550nm



FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	22.50 x 22.50	22.50 x 22.50
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE
PROJECTION

ALL DIMS INmm

Edmund Optics®

TITLE

25mm Sq., 3mm Thick, NIR II Coated λ/10
Fused Silica Window

DWG NO

24308

SHEET

13 OF 24