

[See all 76 Products in Family](#)

0.25 NA 11.0mm FL VIS AR Coated, Molded Aspheric Lens

See More by [Lightpath®](#)



Precision Molded Aspheric Lenses

Stock **#47-142** **20+ In Stock**

⊖ 1 ⊕ C\$166.⁰⁰

ADD TO CART

Volume Pricing	
Qty 1-10	C\$166.60 each
Qty 11-49	C\$149.80 each
Need More?	Request Quote

Product Downloads

General

Aspheric Lens

Type:

Collimate or Focus Laser Light

Typical Applications:

352220

Lightpath Lens Code:

Note:
May be available in limited quantities, or require a minimum purchase quantity. [Contact us](#) for more

Physical & Mechanical Properties

5.0000000000	Center Thickness CT (mm):
5.50	Clear Aperture CA (mm):
7.2000000000 ±0.015	Diameter (mm):
4.210	Edge Thickness ET (mm):
±0.05	Center Thickness Tolerance (mm):

Optical Properties

VS	Coating:
11.0000000000 @ 633nm	Effective Focal Length EFL (mm):
ECO-550	Substrate: <input type="checkbox"/>
Infinite	Magnification:
0.2500000000	Numerical Aperture NA:
1.603	Index of Refraction (n _d):
40-20	Surface Quality:
7.920	Working Distance (mm):
±1	Focal Length Tolerance (%):
Diffraction Limit	Transmitted Wavefront, P-V:
50.22	Abbe Number (v _d):
R _{avg} <0.6% @ 350 - 700nm	Coating Specification:
633.00	Focal Length Specification Wavelength (nm):
2.00	f#:
Diffraction Limited Transmitted Wavefront	Asphere Figure Error (µm RMS):

Environmental & Durability Factors

≤200	Operating Temperature (°C):
------	-----------------------------


Regulatory Compliance

Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	Reach 233:

Product Details

- Eliminate Spherical Aberration
- Multiple Coating Options Available
- Range of Numerical Apertures

LightPath® Geltech™ Molded Aspheric Lenses are used to eliminate spherical aberration and improve focusing and collimating accuracy in a variety of laser applications. Low NA aspheric lenses are designed to maintain beam shape, while high NA lenses gather all available light to maintain beam power over long distances. LightPath® Geltech™ Molded Aspheric Lenses are ideal for applications including sighting systems, bar code scanners, laser diode-to-fiber coupling, optical data storage, or biomedical lasers.

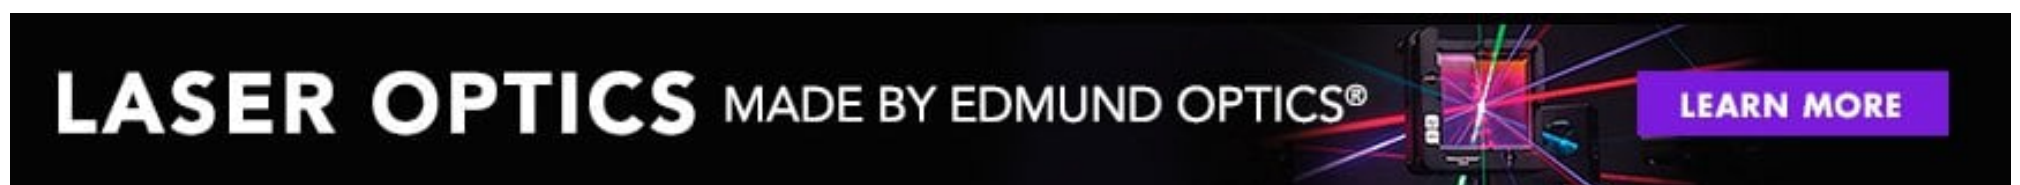

Technical Information

