

[See all 76 Products in Family](#)

# LightPath 354330 | 6.33mm Dia., 0.68 NA, BBAR (350-700nm), Molded Aspheric Lens

See More by [Lightpath®](#)



Precision Molded Aspheric Lenses

Stock **#87-165** **20+ In Stock**

[Other Coating Options](#)

⊖ 1 ⊕ **€119<sup>00</sup>**

**ADD TO CART**

Volume Pricing	
Qty 1-10	<b>€119.00</b> each
Qty 11-49	<b>€107.10</b> each
Need More?	<a href="#">Request Quote</a>

## Product Downloads

### General

354330 **Lightpath Lens Code:**

Aspheric Lens **Type:**

Collimate or Focus Laser Light **Typical Applications:**

### Physical & Mechanical Properties

6.33 ±0.020	<b>Diameter (mm):</b>
5	<b>Clear Aperture CA (mm):</b>
1.56	<b>Edge Thickness ET (mm):</b>
3.21 ±0.03	<b>Center Thickness CT (mm):</b>
Protective as needed	<b>Bevel:</b>

## Optical Properties

3.10 @ 830nm	<b>Effective Focal Length EFL (mm):</b>
0.68	<b>Numerical Aperture NA:</b>
<a href="#">D-ZK3</a>	<b>Substrate:</b> <input type="checkbox"/>
±1	<b>Focal Length Tolerance (%):</b>
830	<b>Aspheric Design Wavelength (nm):</b>
BBAR (350-700nm)	<b>Coating:</b>
$R_{avg} \leq 0.5\%$ @ 350 - 700nm	<b>Coating Specification:</b>
40-20	<b>Surface Quality:</b>
0.74	<b>f#:</b>
60.88	<b>Abbe Number (<math>v_d</math>):</b>
1.586	<b>Index of Refraction (<math>n_d</math>):</b>
350 - 700	<b>Wavelength Range (nm):</b>
1.8	<b>Working Distance (mm):</b>
Infinite	<b>Conjugate Distance:</b>
830.00	<b>Focal Length Specification Wavelength (nm):</b>
< 0.20	<b>Transmitted Wavefront Error (<math>\lambda</math>, RMS):</b>

## Material Properties

7.6	<b>Coefficient of Thermal Expansion CTE (<math>10^{-6}/^{\circ}\text{C}</math>):</b>
-----	--

## Environmental & Durability Factors

≤200	<b>Operating Temperature (<math>^{\circ}\text{C}</math>):</b>
------	---


## Regulatory Compliance

<a href="#">Compliant</a>	<b>RoHS 2015:</b>
<a href="#">View</a>	<b>Certificate of Conformance:</b>
<a href="#">Compliant</a>	<b>Reach 247:</b>

## Product Details

- Eliminate Spherical Aberration
- Multiple Coating Options Available
- Range of Numerical Apertures

LightPath® Geltech™ Molded Aspheric Lenses are used to eliminate spherical aberration and improve focusing and collimating accuracy in a variety of laser applications. Low NA aspheric lenses are designed to maintain beam shape, while high NA lenses gather all available light to maintain beam power over long distances. LightPath® Geltech™ Molded Aspheric Lenses are ideal for applications including sighting systems, bar code scanners, laser diode-to-fiber coupling, optical data storage, or biomedical lasers.

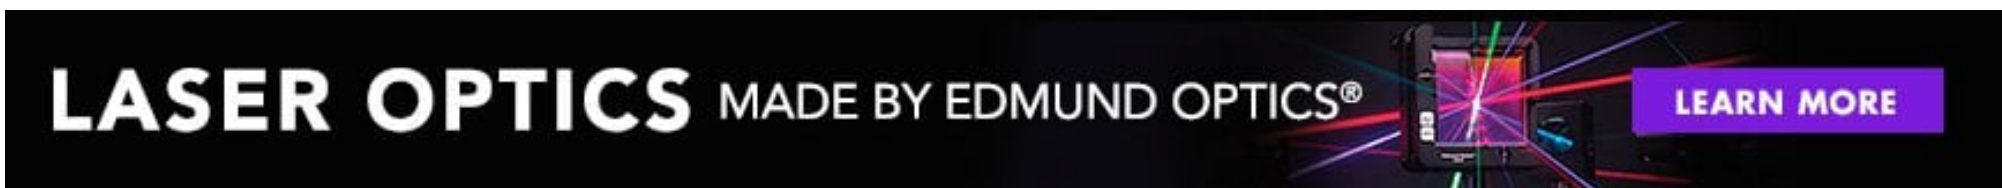

## Technical Information



;