

TECHSPEC<sup>®</sup> 100mm Dia., 6mm Thick, VIS 0° Coated  $\lambda$ /4 N-BK7 Window



Stock **#17-298** 7 In Stock

-

1

+

C\$826<sup>.00</sup>

ADD TO CART

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-5        | C\$826.00 each                |
| Qty 6-25       | C\$659.40 each                |
| Qty 26-49      | C\$618.80 each                |
| Need More?     | <a href="#">Request Quote</a> |

Product Downloads

|        |           |
|--------|-----------|
| 403.00 | #Sorting: |
|--------|-----------|

General

|                                        |       |
|----------------------------------------|-------|
| Protective Window                      | Type: |
| Surface Flatness is specified per inch | Note: |

Physical & Mechanical Properties

|                      |                          |
|----------------------|--------------------------|
| 100.00 +0.0/-0.25    | Diameter (mm):           |
| 6.00 ±0.20           | Thickness (mm):          |
| <1                   | Parallelism (arcmin):    |
| Protective as needed | Bevel:                   |
| 90                   | Clear Aperture (%):      |
| Fine Ground          | Edges:                   |
| 0.21                 | Poisson's Ratio:         |
| 82                   | Young's Modulus (GPa):   |
| 610.00               | Knoop Hardness (kg/mm²): |

|                                      |                                        |
|--------------------------------------|----------------------------------------|
| Optical Properties                   |                                        |
| VS 0° (425-675nm)                    | Coating:                               |
| N-BK7                                | Substrate: □                           |
| 1.516                                | Index of Refraction (n <sub>d</sub> ): |
| 60-40                                | Surface Quality:                       |
| 64.17                                | Abbe Number (v <sub>d</sub> ):         |
| R <sub>avg</sub> ≤0.4% @ 425 - 675nm | Coating Specification:                 |
| 425 - 675                            | Wavelength Range (nm):                 |
| λ/4                                  | Surface Flatness (P-V):                |
| 5 J/cm² @ 532nm, 10ns                | Damage Threshold, Reference:           |

|                                           |                                                              |
|-------------------------------------------|--------------------------------------------------------------|
| Material Properties                       |                                                              |
| 2.51                                      | Density (g/cm³):                                             |
| 7.1 (-30 to +70°C)<br>8.3 (+20 to +300°C) | Coefficient of Thermal Expansion CTE (10 <sup>-6</sup> /°C): |

|                       |                             |
|-----------------------|-----------------------------|
| Regulatory Compliance |                             |
| Compliant             | RoHS 2015:                  |
| View                  | Certificate of Conformance: |
| Compliant             | Reach 235:                  |

## Product Details


- Circular and Rectangular Sizes from 2mm to 200mm
- 8 Broadband Anti-Reflection Coating Options Available
- World's Largest Selection of Standard N-BK7 Windows
- Also Available with [Ultra-Thin N-BK7 Windows](#)

TECHSPEC® λ/4 N-BK7 Precision Windows are ideally suited for industrial and low-power laser applications. The high tolerance design yields minimal beam distortion and scatter. Broadband coating options extend the range of these precision windows through the visible and near-infrared spectra. TECHSPEC® λ/4 N-BK7 Precision Windows are offered in circular and rectangular sizes ranging from 2mm to 200mm.

**Note:** New additions to this product family may be specified with a transmitted wavefront distortion (TWD) specification instead of a surface flatness. For more information on the difference between these two specifications, see our application note on [Understanding Optical Windows](#).

## Technical Information




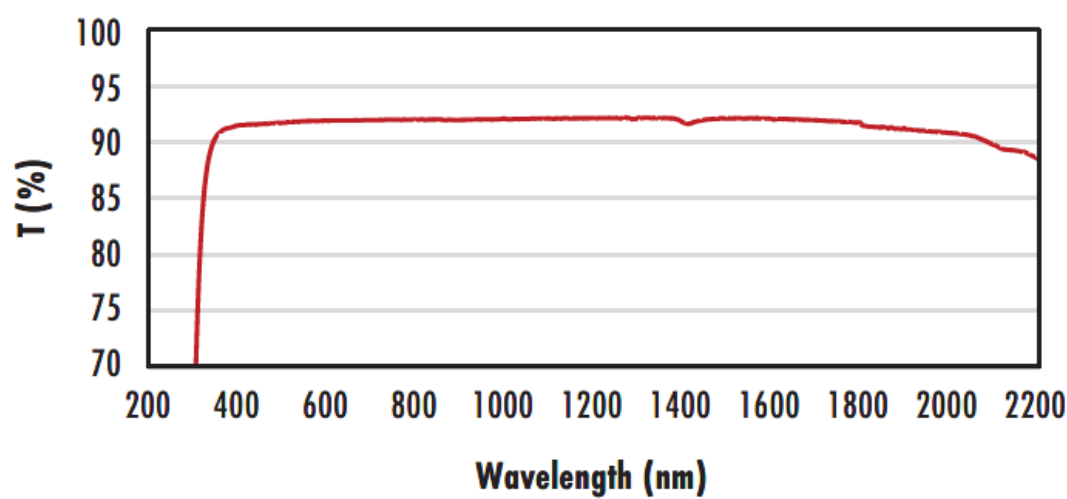

Typical transmission of a 3mm thick, uncoated N-BK7 window across the UV - NIR spectra.

[Click Here to Download Data](#)

**N-BK7 with MgF<sub>2</sub> Coating  
Typical Transmission**

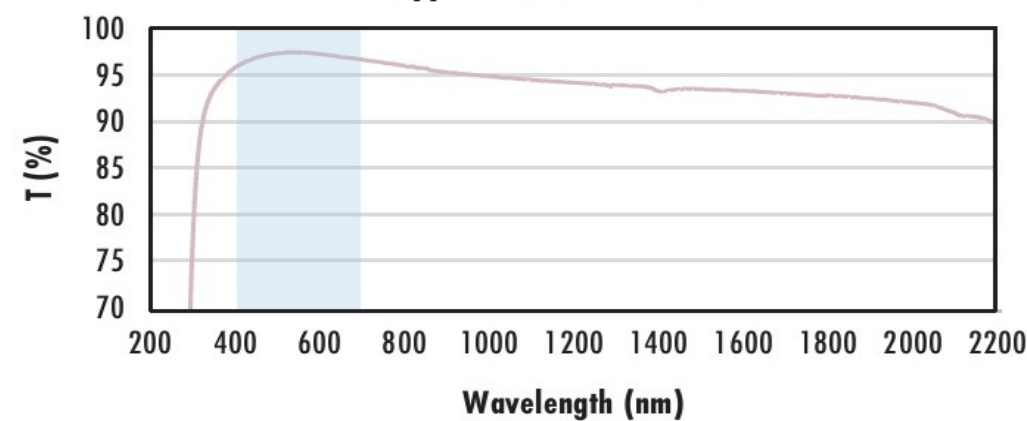

Typical transmission of a 3mm thick N-BK7 window with MgF<sub>2</sub> (400-700nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 1.75\% \text{ @ } 400 - 700\text{nm (N-BK7)}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

**N-BK7 with VIS-EXT Coating  
Typical Transmission**

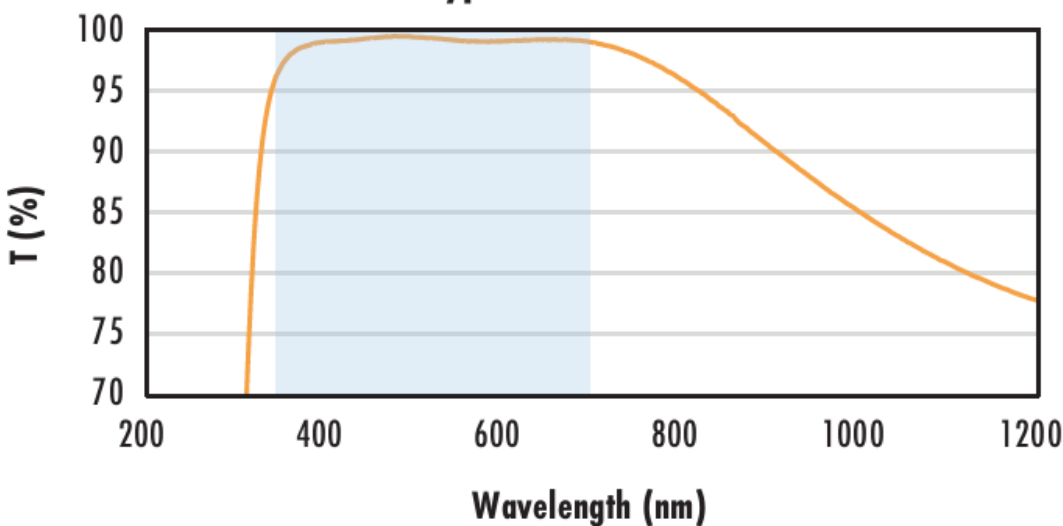

Typical transmission of a 3mm thick N-BK7 window with VIS-EXT (350-700nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 0.5\% \text{ @ } 350 - 700\text{nm}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

**N-BK7 with VIS-NIR Coating  
Typical Transmission**

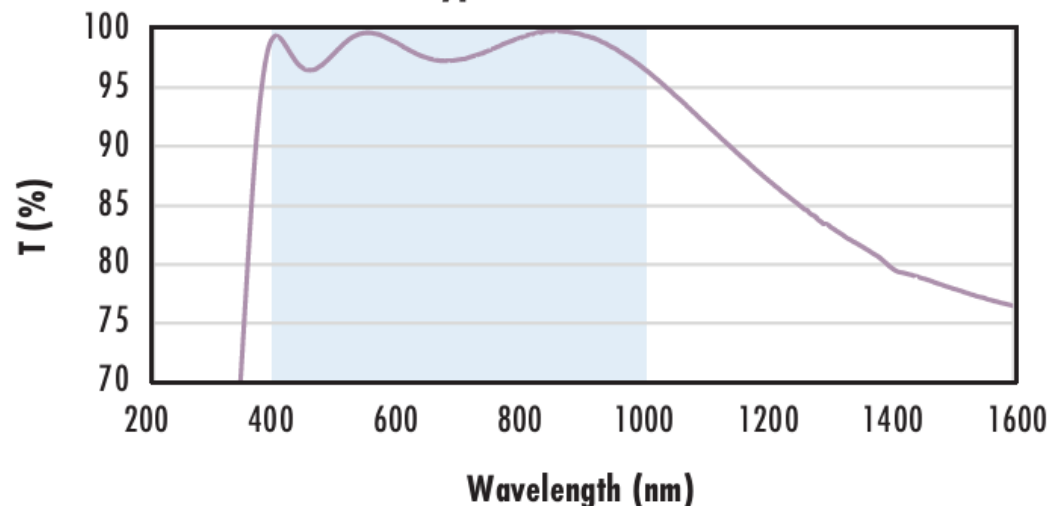

Typical transmission of a 3mm thick N-BK7 window with VIS-NIR (400-1000nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{abs} \leq 0.25\% \text{ @ } 880\text{nm}$$


$$R_{avg} \leq 1.25\% \text{ @ } 400 - 870\text{nm}$$

$$R_{avg} \leq 1.25\% \text{ @ } 890 - 1000\text{nm}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

**N-BK7 with VIS 0° Coating  
Typical Transmission**

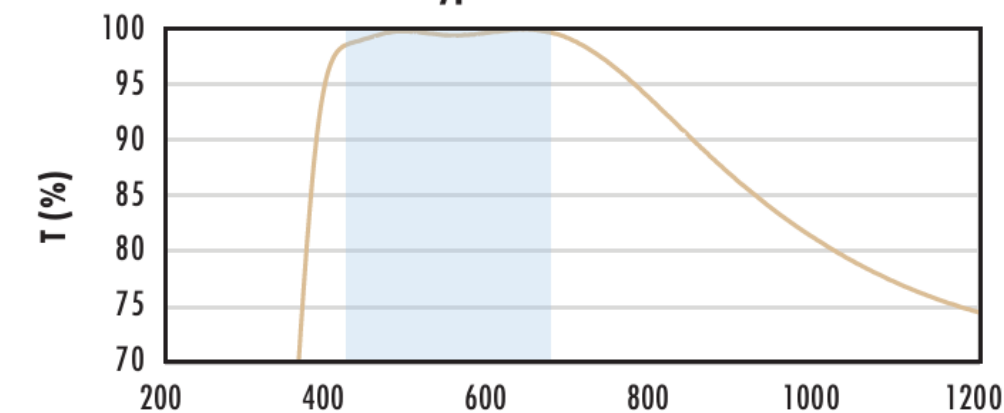

Typical transmission of a 3mm thick N-BK7 window with VIS 0° (425-675nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 0.4\% \text{ @ } 425 - 675\text{nm}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)



