


(1+1)x1 Fiber Pump and PM Combiner

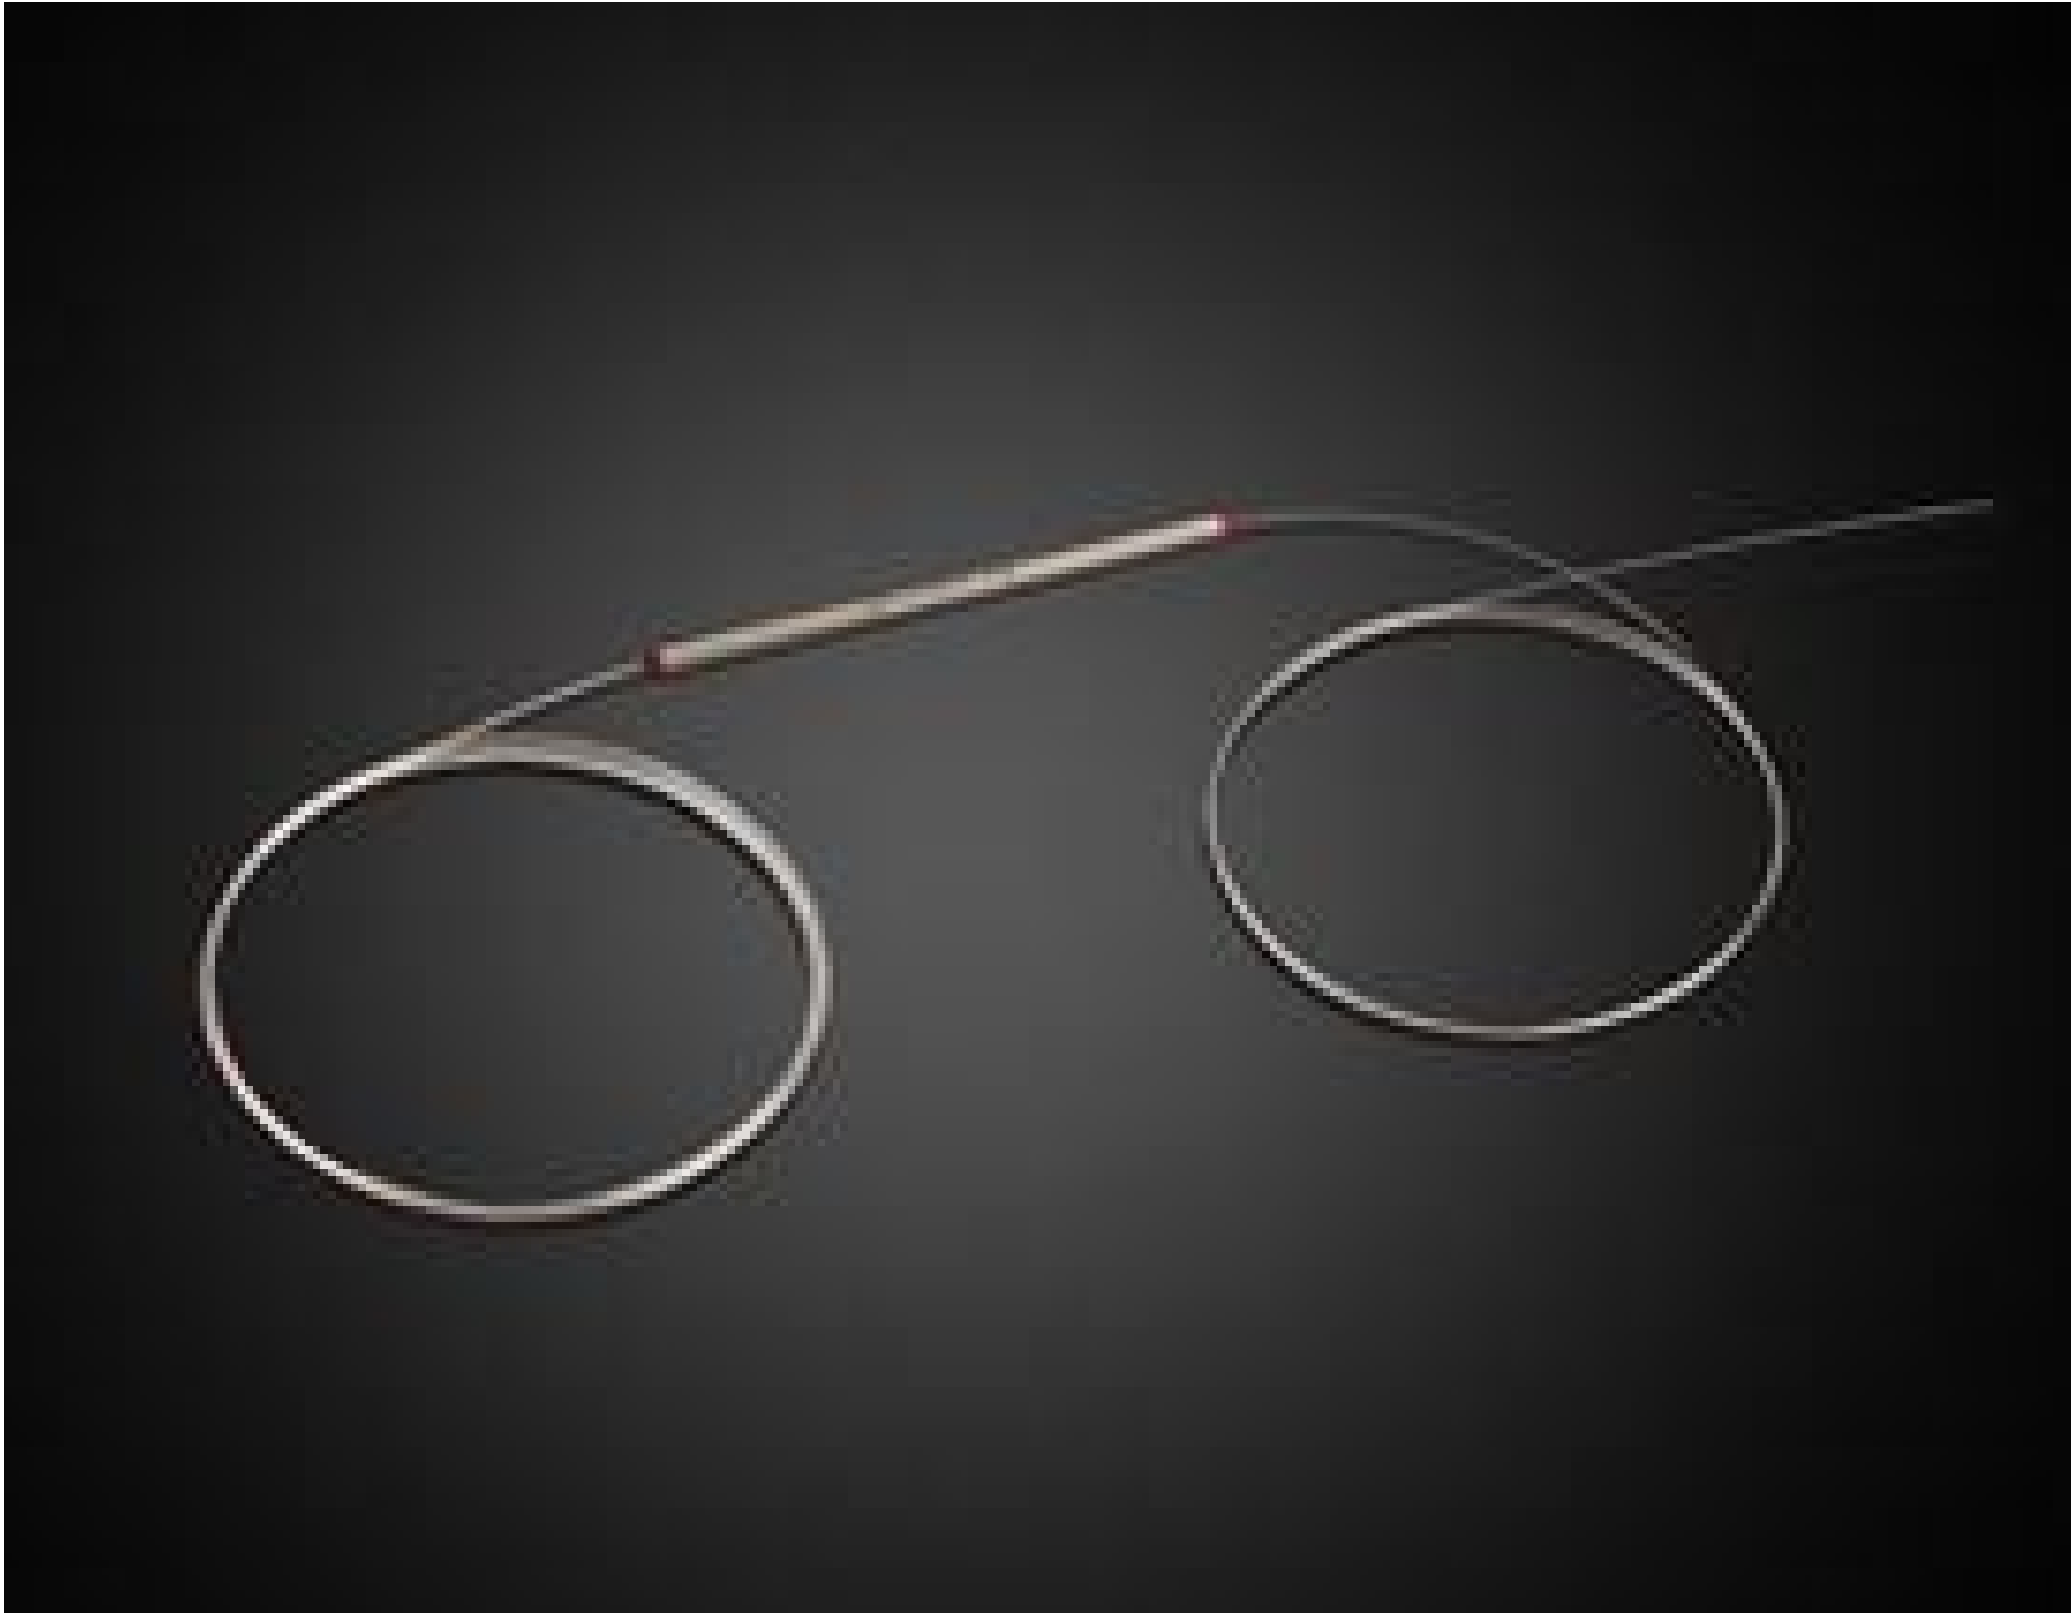

(1+1)x1 Multimode Pump and Signal Combiners

Stock #91-307

NEW

1 In Stock

-

1

+

C\$700⁰⁰

ADD TO CART

Volume Pricing	
Qty 1+	C\$700.00 each
Need More?	Request Quote

Product Downloads

General

Fiber Cable Type:

Signal Input/Output Fiber: 10/130 PMdouble cladding fiber

Pump Fiber: 105/125 MMfiber

Physical & Mechanical Properties

Length of Fiber (m):

1

Optical Properties

Extinction Ratio:

>25 dB

1450 - 1600	Signal Wavelength Range (nm):
800 - 1000	Pump Wavelength Range (nm):
>45	Return Loss (dB):

Performance

>92	Pump Transmission Efficiency (%):
50	Handling Power (Per Port):

Hardware & Interface Connectivity

<0.2 (Typ)	Insertion Loss (dB):
------------	----------------------

Environmental & Durability Factors

-5 to +70	Operating Temperature (°C):
-40 to +86	Storage Temperature (°C):

Regulatory Compliance

Compliant	RoHS 2015:
View	Certificate of Conformance:

Product Details

- Combines Laser Pump Sources and One Signal into One Output Fiber
 - Wavelength Insensitive with High Power Transfer Efficiency
 - Preservation of Modal Content
- Multimode Fiber Pump and Signal Combiners integrate high-power pump lasers and low-power signal lasers into a single optical fiber, ensuring efficient energy transfer, brightness preservation, and excellent optical performance. Designed for easy system integration, the combiners support compact packaging and seamless incorporation into fiber laser and amplifier systems. Multimode Fiber Pump and Signal Combiners include a heat sink package and a built-in port for temperature monitoring. These combiners are ideal for co- and counter-pump configurations and for fiber laser and laser power amplifier applications in industrial, military, medical, and telecommunications markets.
- Note:** [Contact us](#) for custom configuration options as these combiners can be tailored to support a wide range of power levels, input configurations, and fiber types.