

# 2.05 x 1.30mm, 0.192 ROC, 250µm Pitch, Fused Silica, 1 x 4 Linear Microlens Array



Stock #21-172 **1 In Stock**

1 **C\$172<sup>.20</sup>**

**ADD TO CART**

#21-183, 7.45 x 2.20mm, 1.119 ROC, 750µm Pitch, 1 x 8 Linear Microlens Array

Volume Pricing	
Qty 1-10	C\$172.20 each
Qty 11-25	C\$155.40 each
Qty 26-49	C\$147.00 each
Need More?	<a href="#">Request Quote</a>

Product Downloads	
STEP:step	Curve:pdf
PDF Drawing:pdf	IGES:igs
eDrawing:eprt	
EO Spec Sheet	<b>Download All</b>

## General

<b>Type:</b> 1 x 4 Linear Array	<b>Lens Profile:</b> Spherical
<b>Note:</b> Linear arrays are centered on the part and surrounded by inactive lenses.	

## Physical & Mechanical Properties

<b>Diameter (mm):</b> 0.18 (of each lens)	<b>Clear Aperture CA (mm):</b> 0.14 (of each lens)
<b>Dimensions (mm):</b> 2.05 x 1.30 ±0.05	<b>Radius R (mm):</b> 0.192 ±3%
<b>Thickness (mm):</b> 0.60 ±0.01	

## Optical Properties

<b>Substrate:</b> <b>Fused Silica</b> (Corning 7980)	<b>Coating:</b> BBAR (1260-1675nm), Lens Side
<b>Wavelength Range (nm):</b> 1260 - 1675	<b>Coating Specification:</b> R <sub>avg</sub> ≤0.3% @ 1260 - 1675
<b>Design Wavelength DWL (nm):</b> 1550	<b>Pitch (µm):</b> 250 ±0.3
<b>Working Distance (mm):</b> 0.01 in glue (n <sub>d</sub> = 1.5) 0.015	<b>Mode Field Diameter (mm):</b> Source: 0.0104 Target: 0.085

## Regulatory Compliance



## Product Details

- Fused Silica and Silicon Substrates
- 1x4 and 1x8 Lens Array Configurations
- Ideal for Fiber Coupling and Collimating

Linear Microlens Arrays are available in fused silica and silicon substrates with linear arrays of either 4 or 8 lenses. Silicon has a high index of refraction, enabling short focal length, high-NA lens array designs, while fused silica offers excellent thermal stability and visible transmission to facilitate easy alignment. Linear Microlens Arrays are used to collimate and couple fiber arrays in fiber-to-fiber or laser-to-fiber applications, such as with semiconductor laser diodes. These lenses are AR coated for the near-infrared (NIR) with designs for 1310 and 1550nm, making them ideal for use with NIR lasers or in telecommunications.

## Technical Information

MFD, Source (μm)	MFD, Target (μm)	Working Distance (μm)	Design Wavelength (nm)	Substrate	Stock No. 1x4 Array	Stock No. 1x8 Array
10.4	85	15 in air, 10 in glue	1550	Fused Silica	<a href="#">#21-172</a>	<a href="#">#21-173</a>
9.2	250	600	1550	Fused Silica	<a href="#">#21-174</a>	<a href="#">#21-175</a>
9.2	80	286	1310	Silicon	<a href="#">#21-176</a>	<a href="#">#21-177</a>
10.4	250	1143	1550	Silicon	<a href="#">#21-178</a>	<a href="#">#21-179</a>
9.2	25	1202	1310	Silicon	<a href="#">#21-180</a>	<a href="#">#21-181</a>
3.0	250	304	1310	Silicon	<a href="#">#21-182</a>	<a href="#">#21-183</a>

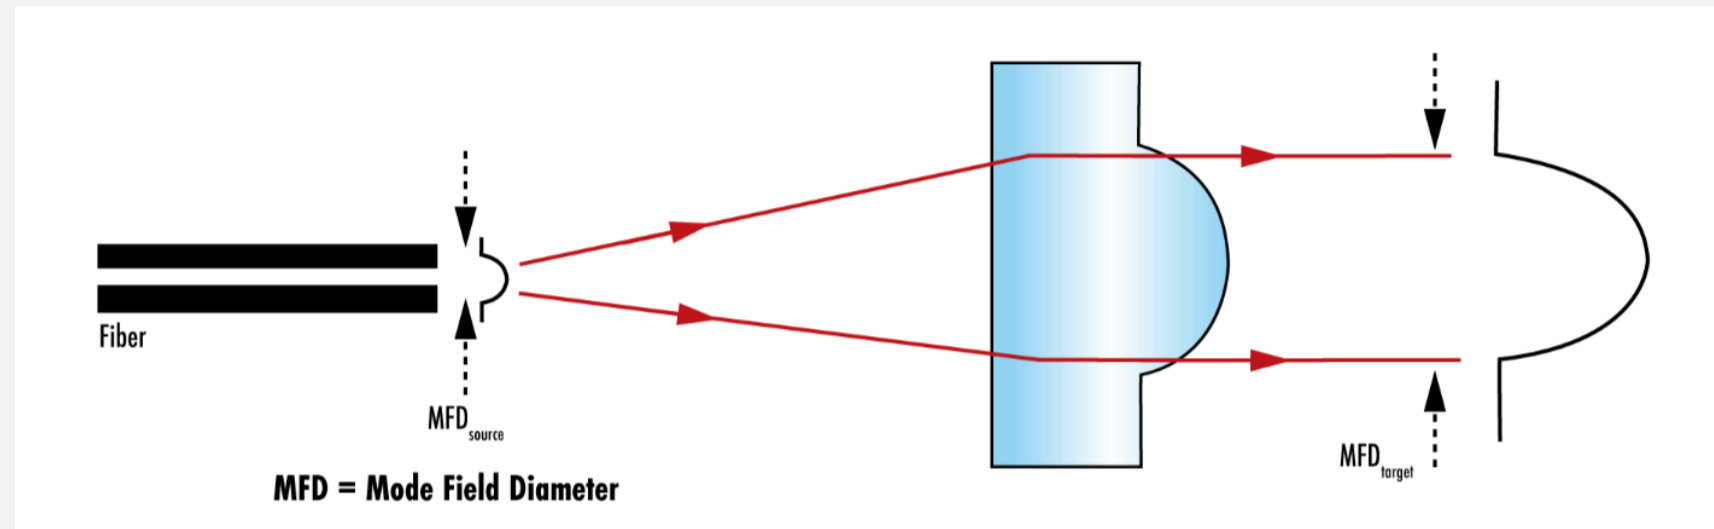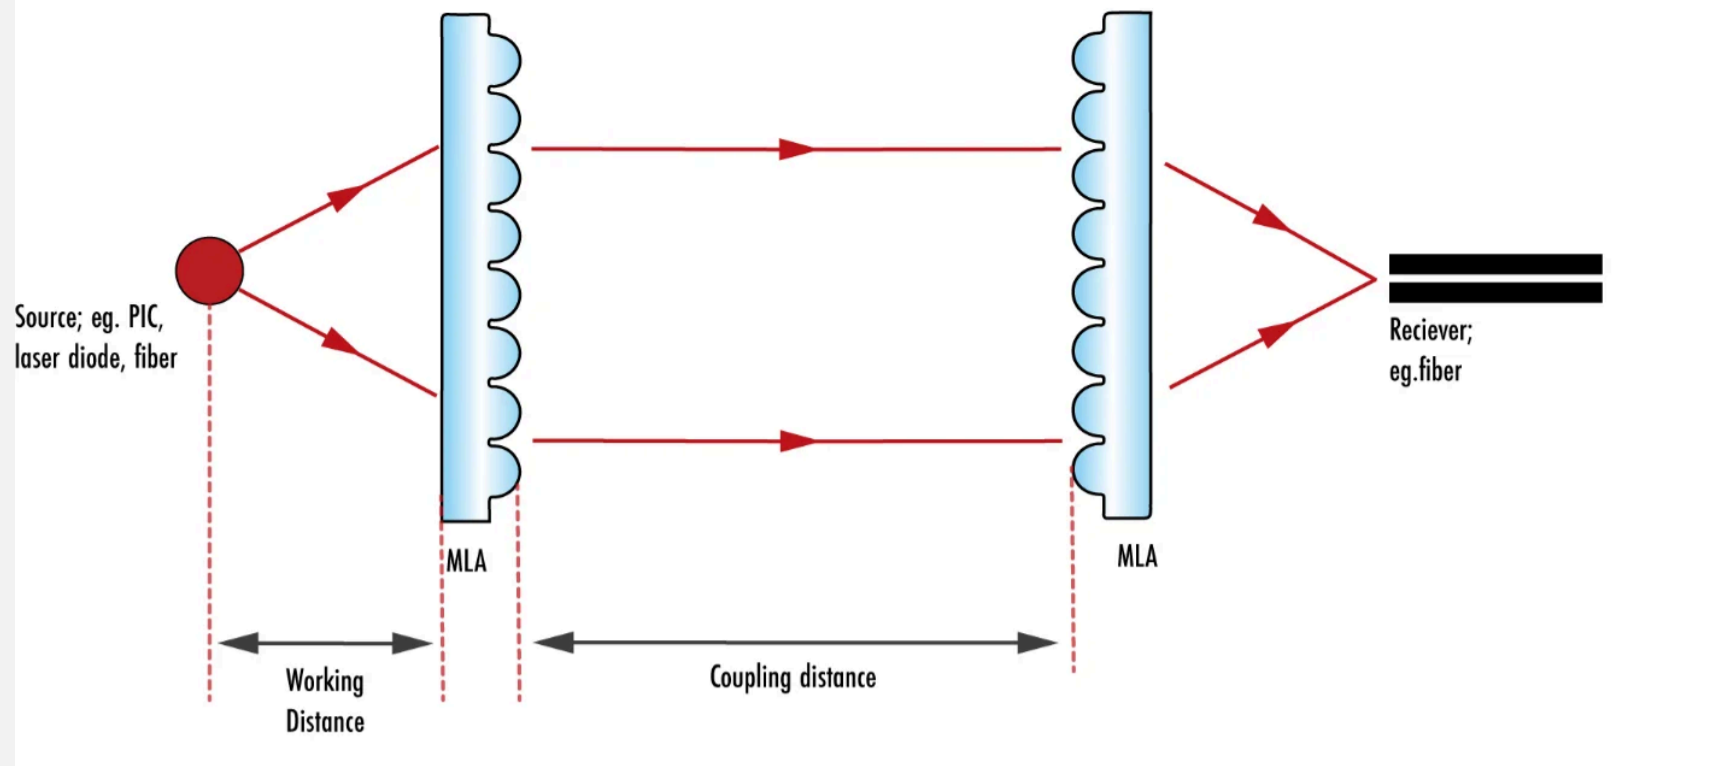


## Related Products



Norland Optical Adhesives



Norland Index Matching Liquid (IML) 150

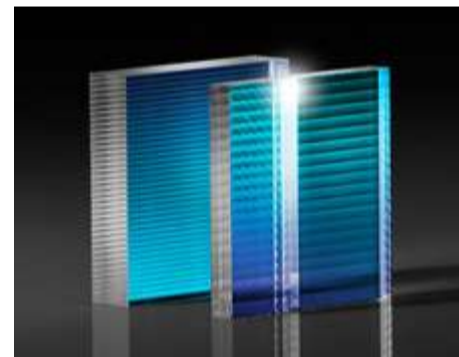

Microlens Arrays

## Frequently Purchased Together



#55-155 - Preloaded Norland Optical Adhesive NOA 61 Dispensing Barrel (3cc)  
C\$41.25

Qty



#55-158 - Preloaded Norland Optical Adhesive NOA 68 Dispensing Barrel (3cc)  
C\$41.25

Qty



#15-488 - 12.5 x 12.5mm, Rhodium Coated First Surface Mirror  
C\$48.30

Qty



#15-490 - 25 x 25mm, Rhodium Coated First Surface Mirror  
C\$66.85

Qty

