

TECHSPEC<sup>®</sup> 20mm Diameter x -30 FL, NIR II Coated, Plano-Concave Lens



Stock **#67-996** **14 In Stock**  
[Other Coating Options](#)

-

1

+

C\$68<sup>.04</sup>

ADD TO CART

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-9        | C\$68.04 each                 |
| Qty 10-25      | C\$61.24 each                 |
| Qty 26-49      | C\$54.43 each                 |
| Need More?     | <a href="#">Request Quote</a> |

Product Downloads

SPECIFICATIONS

General

Type:

|                                             |                                                                                                                        |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Plano-Concave Lens                          |                                                                                                                        |
| Physical & Mechanical Properties            |                                                                                                                        |
| Diameter (mm):                              | 20.00 +0.0/-0.025                                                                                                      |
| Center Thickness CT (mm):                   | 3.50                                                                                                                   |
| Center Thickness Tolerance (mm):            | ±0.10                                                                                                                  |
| Centering (arcmin):                         | <1                                                                                                                     |
| Clear Aperture CA (mm):                     | 19.00                                                                                                                  |
| Edge Thickness ET (mm):                     | 5.39                                                                                                                   |
| Optical Properties                          |                                                                                                                        |
| Effective Focal Length EFL (mm):            | -30.00                                                                                                                 |
| Substrate:                                  | N-SF11                                                                                                                 |
| f#:                                         | 1.5                                                                                                                    |
| Coating:                                    | NIR II (750-1550nm)                                                                                                    |
| Wavelength Range (nm):                      | 750 - 1550                                                                                                             |
| Back Focal Length BFL (mm):                 | -31.96                                                                                                                 |
| Coating Specification:                      | R <sub>abs</sub> ≤1.5% @ 750 - 800nm<br>R <sub>abs</sub> ≤1.0% @ 800 - 1550nm<br>R <sub>avg</sub> ≤0.7% @ 750 - 1550nm |
| Focal Length Specification Wavelength (nm): | 587.6                                                                                                                  |
| Focal Length Tolerance (%):                 | ±1.00                                                                                                                  |
| Radius R <sub>1</sub> (mm):                 | -23.54                                                                                                                 |
| Surface Quality:                            | 40-20                                                                                                                  |
| Damage Threshold, By Design:                | 8 J/cm <sup>2</sup> @ 1064nm, 10ns                                                                                     |
| Power (P-V) @ 632.8nm:                      | 1.5λ                                                                                                                   |
| Irregularity (P-V) @ 632.8nm:               | λ/4                                                                                                                    |
| Regulatory Compliance                       |                                                                                                                        |
| RoHS 2015:                                  | Compliant                                                                                                              |
| Certificate of Conformance:                 | View                                                                                                                   |
| Reach 235:                                  | Compliant                                                                                                              |

## PRODUCT DETAILS

- AR Coated to Provide <0.7% Reflectance per Surface for 750 - 1550nm
- Designed for 0° Angle of Incidence
- Various Coating Options: [Uncoated](#), [VIS-EXT](#), [MgF<sub>2</sub>](#), [VIS 0°](#), [VIS-NIR](#), [YAG-BBAR](#), and [NIR I](#)

TECHSPEC® NIR II Coated Plano-Concave (PCV) Lenses are designed to bend parallel input rays to diverge from one another on the lens's output side causing this lens to have a negative focal length. These lenses can be used for balancing aberrations created by other lenses within a system due to their negative spherical aberration. Plano-Concave (PCV) lenses are commonly used in a variety of applications including image reduction, beam expansion and telescopes. TECHSPEC NIR II Coated Plano-Concave (PCV) Lenses offer optimal performance in the 750 to 1550nm range. These lenses are also available [Uncoated](#), [VIS-EXT](#), [MgF<sub>2</sub>](#), [VIS 0°](#), [VIS-NIR](#), [YAG-BBAR](#), or with [NIR I](#) AR coating options.

## TECHNICAL INFORMATION



N-BK7

### Uncoated N-BK7 Typical Transmission



Typical transmission of a 3mm thick, uncoated N-BK7 window across the UV - NIR spectra.

[Click Here to Download Data](#)

### N-BK7 with MgF<sub>2</sub> Coating Typical Transmission



Typical transmission of a 3mm thick N-BK7 window with MgF<sub>2</sub> (400-700nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{avg} \leq 1.75\% @ 400 - 700\text{nm}$  (N-BK7)

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

### N-BK7 with VIS-EXT Coating Typical Transmission



Typical transmission of a 3mm thick N-BK7 window with VIS-EXT (350-700nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{avg} \leq 0.5\% @ 350 - 700\text{nm}$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

### N-BK7 with VIS-NIR Coating Typical Transmission



Typical transmission of a 3mm thick N-BK7 window with VIS-NIR (400-1000nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:




The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{abs} \leq 0.25\% @ 880\text{nm}$   
 $R_{avg} \leq 1.25\% @ 400 - 870\text{nm}$   
 $R_{avg} \leq 1.25\% @ 890 - 1000\text{nm}$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

**N-BK7 with VIS 0° Coating  
Typical Transmission**

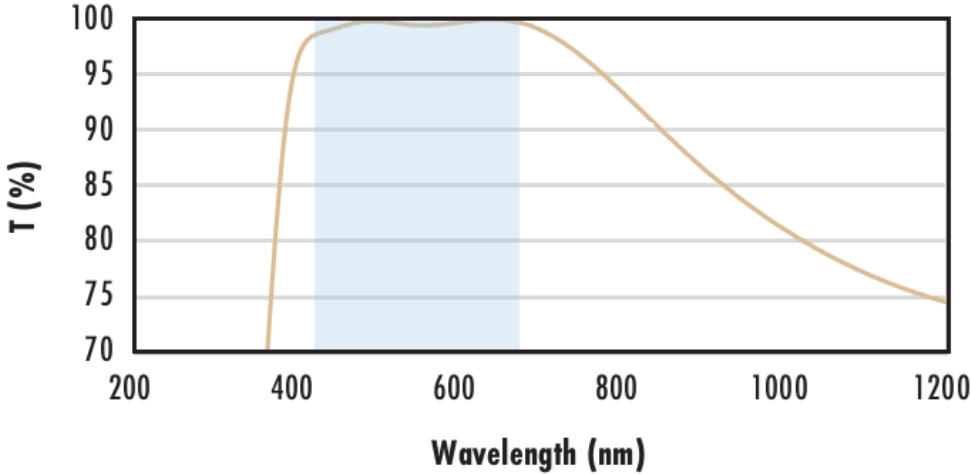

Typical transmission of a 3mm thick N-BK7 window with VIS 0° (425-675nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{avg} \leq 0.4\% @ 425 - 675\text{nm}$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

**N-BK7 with YAG-BBAR Coating  
Typical Transmission**

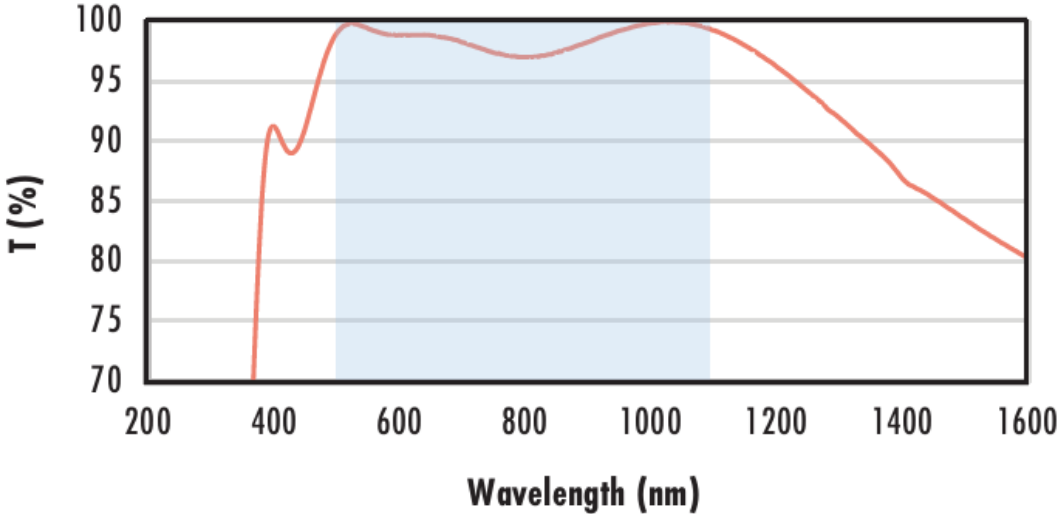

Typical transmission of a 3mm thick N-BK7 window with YAG-BBAR (500-1100nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{abs} \leq 0.25\% @ 532\text{nm}$   
 $R_{abs} \leq 0.25\% @ 1064\text{nm}$   
 $R_{avg} \leq 1.0\% @ 500 - 1100\text{nm}$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

**N-BK7 with NIR I Coating  
Typical Transmission**

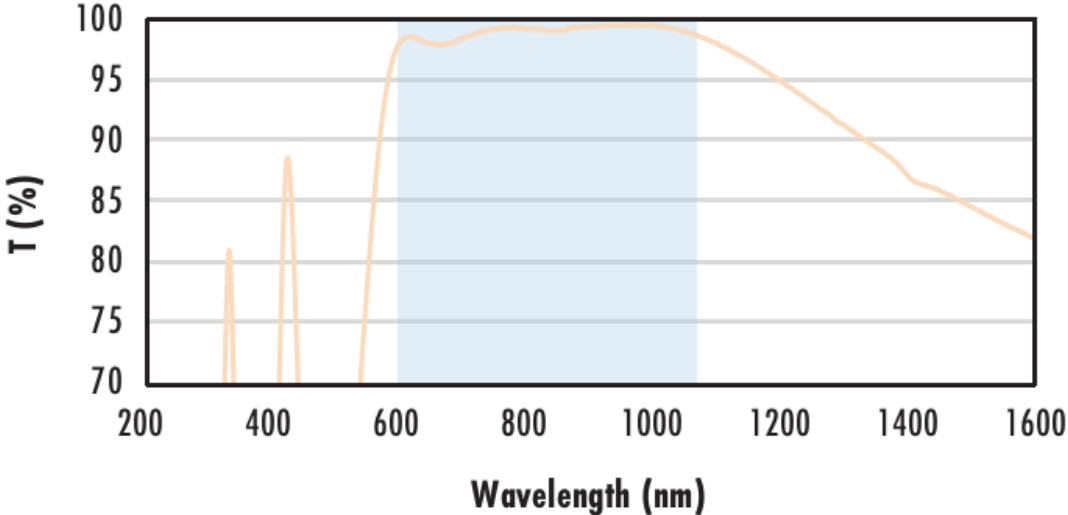

Typical transmission of a 3mm thick N-BK7 window with NIR I (600 - 1050nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{avg} \leq 0.5\% @ 600 - 1050\text{nm}$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

**N-BK7 with NIR II Coating  
Typical Transmission**

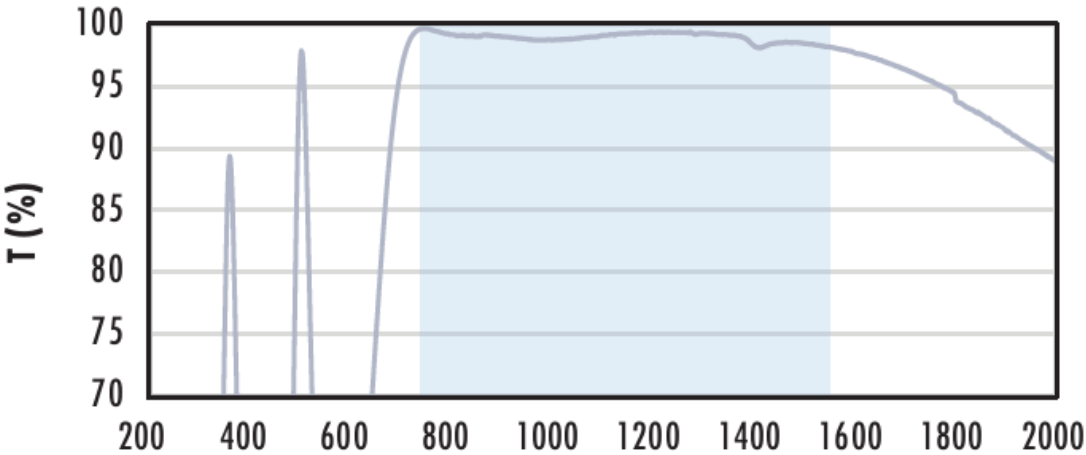

Typical transmission of a 3mm thick N-BK7 window with NIR II (750 - 1550nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{abs} \leq 1.5\% @ 750 - 800\text{nm}$   
 $R_{abs} \leq 1.0\% @ 800 - 1550\text{nm}$   
 $R_{avg} \leq 0.7\% @ 750 - 1550\text{nm}$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

Wavelength (nm)

CUSTOM

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

COMPATIBLE MOUNTS

