

[See all 3 Products in Family](#)

TECHSPEC® 25.4mm Dia., 6.35mm Thick, 355nm, Nd:YAG IBS Laser Line Window



TECHSPEC® IBS Laser Line Windows

Stock **#12-969** **20+ In Stock**

⊖ 1 ⊕ C\$246⁰⁰

ADD TO CART

Volume Pricing	
Qty 1-5	C\$246.40 each
Qty 6-25	C\$197.40 each
Qty 26-49	C\$184.80 each
Need More?	Request Quote

Product Downloads

General

Laser Line Window **Type:**

Physical & Mechanical Properties

22.86 **Clear Aperture CA (mm):**

25.40 +0.00/-0.10 **Diameter (mm):**

6.35 ±0.20	Thickness (mm):
<3	Parallelism (arcmin):
Protective as needed	Bevel:
90	Clear Aperture (%):
Fine Ground	Edges:
0.16	Poisson's Ratio:
73	Young's Modulus (GPa):
522.00	Knoop Hardness (kg/mm²):

Optical Properties

0	Angle of Incidence (°):
Laser Ultra V-Coat, IBS (355nm)	Coating:
355	Design Wavelength DWL (nm):
Fused Silica (Coming 7980)	Substrate: <input type="checkbox"/>
1.458	Index of Refraction (n_d):
10-5	Surface Quality:
67.8	Abbe Number (v_d):
R _{abs} <0.10% @ 355nm	Coating Specification:
M10	Surface Flatness (P-V):
7.5 J/cm ² @ 355nm, 20ns, 20Hz	Damage Threshold, Certified:

Material Properties

2.20	Density (g/cm³):
0.52 (+5 to +35°C) 0.57 (0 to +200°C) 0.48 (-100 to +200°C)	Coefficient of Thermal Expansion CTE (10⁻⁶/°C):
7980 0F	Fused Silica Grade:


Regulatory Compliance

View	Certificate of Conformance:
----------------------	------------------------------------

Product Details

- IBS Coated for Minimal Absorption and Scatter
- <0.1% Reflectivity at Nd:YAG Laser Lines
- Certified Laser Damage Thresholds at Design Wavelength

TECHSPEC® IBS Laser Line Windows feature an ion beam sputtering (IBS) anti-reflection coating that provides <0.1% reflectivity at their design wavelength with minimal losses due to absorption or scatter. The IBS coating process produces dense, homogeneous coating layers that are environmentally stable and insensitive to temperature and humidity changes, enabling these windows to be used in harsh environments. TECHSPEC IBS Laser Line Windows are available in standard imperial sizes with designs for the Nd:YAG laser wavelengths of 355nm, 532nm, and 1064nm. In-house manufacturing enables Edmund Optics to provide custom sizes and designs in the wavelength range 343nm to 1600nm.

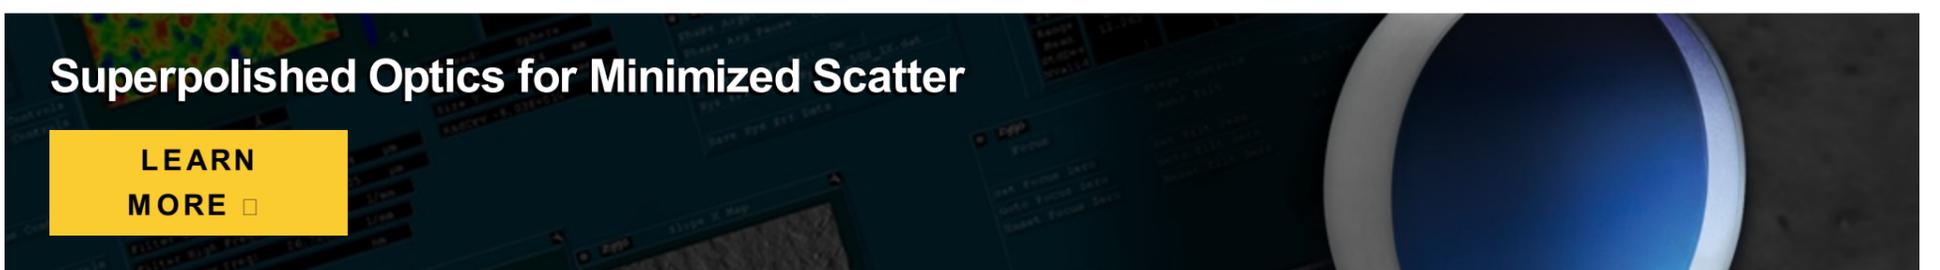

Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

Compatible Mounts
