

# TECHSPEC® 25.0/25.4mm Optic Dia., L-Slot Direct Mount



25.4mm L-Slot Direct Mount, #36-410

Stock #36-410 **20+ In Stock**

1

C\$95<sup>.20</sup>

**ADD TO CART**

Volume Pricing	
Qty 1+	C\$95.20 each
Need More?	<a href="#">Request Quote</a>

Product Downloads	
STEP:step	PDF Drawing:pdf
IGES:igs	eDrawing:eprt
EO Spec Sheet	<a href="#">Download All</a>

## General

<b>Type:</b> Fixed	<b>Type of Optics:</b> Circular
<b>Note:</b> L-Slot	

## Physical & Mechanical Properties

<b>Clear Aperture CA (mm):</b> 22.0	<b>Construction:</b> Black Anodized Aluminum
<b>1" Optical Axis Height:</b> Yes	<b>Centerline Height (mm):</b> 25.4

## Threading & Mounting

<b>Size of Compatible Optics (mm):</b> 25.0 - 25.4	<b>Thickness of Compatible Optics (mm):</b> 1.0 - 14.0
<b>Barrel Thread:</b> ID1 (1.035" x 40 TPI)	

## Regulatory Compliance

<b>RoHS 2015:</b> <a href="#">Compliant</a>	<b>Reach 224:</b> <a href="#">Compliant</a>
<b>Certificate of Conformance:</b> <a href="#">View</a>	

## Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

## Product Details

- Direct to Breadboard Mounting
- 25.4mm Centerline Height
- Compact Form Factor

TECHSPEC® Compact Direct Mounts enable direct mounting to an optical table or breadboard. These mounts maintain a 25.4mm centerline height, which enables seamless integration from laboratory to OEM use. Available for 25.4mm and 12.7mm diameter optics or 25mm cube beamsplitters, these components provide a convenient all-in-one method for optic mounting. Our TECHSPEC Compact Direct Mounts eliminate the needless tolerance stack of conventional post and post holders, with <4 arcmin perpendicularity from lens shelf to base. Direct mounts are ideal for use with TECHSPEC Kinematic Mounts and the 25.4mm centerline height and aluminum construction offers mounting for integration into the most demanding applications.

## Technical Information

*Side Flange Type (#36-414 & #36-418)*

*Cube Beamsplitter Type (#36-415)*

*L-Slot Type (#36-411 & #36-417) Optic Rotation*

*L-Slot Type (#36-410 & #36-416)*

## Related Products




English and Metric Breadboards



#11-046 - Multi-Element Tube Spanner Wrench  
C\$79.80

Qty 

## Frequently Purchased Together

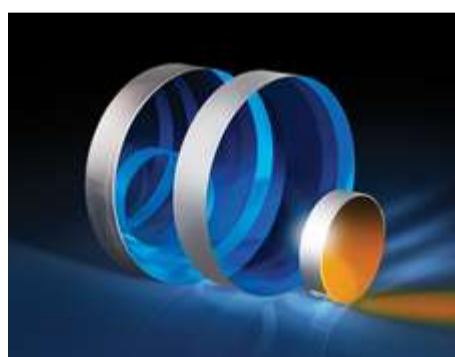

#01-913-577 - 1" Dia. Protected Silver,  $\lambda/10$  Flat Fused Silica  
C\$238.00

Qty 



#03-668 - 2.0 - 35.0mm Optic Dia., Three-Screw Adjustable Ring Mount  
C\$88.20

Qty 



#30-938 - 2.0 OD 25mm Diameter, Reflective ND Filter  
C\$83.93

Qty 




#33-325 - 512nm CWL, 50mm Dia, 25nm Bandwidth, OD 6 Fluorescence Filter  
C\$1,353.80

Qty 

## Resources

- Application Note
- Video
- FAQ
- Glossary
- Trending in Optics

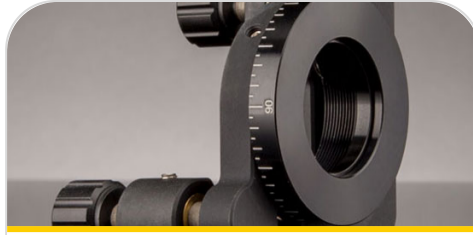

APPLICATION NOTE


### A Closer Look at Kinematic Movement



NEW from Edmund Optics  
E-Series Kinematic  
Optical Mirror Mounts

VIDEO

### E-Series Kinematic Optical Mirror Mounts

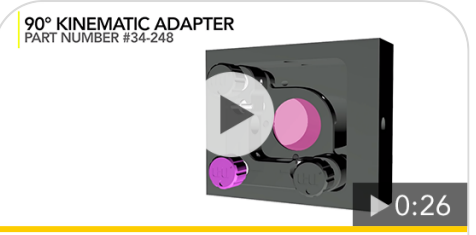

90° KINEMATIC ADAPTER  
PART NUMBER #34-248


VIDEO

### TECHSPEC® 90° Kinematic Adapter



VIDEO

### Important Concepts for Selecting Optical...

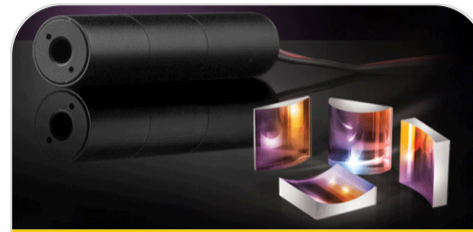

FAQ

### How do truncated optics eliminate the...



GLOSSARY

### Gimbal

[View More](#)