

[See all 64 Products in Family](#)

TECHSPEC[®]

25mm Dia Enhanced Aluminum, $\lambda/20$ Mirror



Stock **#34-360** 7 In Stock

-

1

+

C\$232^{.40}

ADD TO CART

Volume Pricing	
Qty 1-5	C\$232.40 each
Qty 6-25	C\$184.80 each
Qty 26-49	C\$175.00 each
Need More?	Request Quote

Product Downloads

General

Flat Mirror

Type:

Physical & Mechanical Properties

25.00 +0.0/-0.20

Diameter (mm):

4.00 ±0.20

Thickness (mm):

	Back Surface:
Commercial Polish	
	Clear Aperture (%):
90.00	
	Edges:
Ground, protective bevel as needed	
	Parallelism (arcsec):
30.00	

Optical Properties	
	Coating Type:
Metal	
	Coating:
Enhanced Aluminum (450-650nm)	
	Surface Flatness (P-V):
$\lambda/20$ (flatness pre-coating)	
	Wavelength Range (nm):
450 - 650	
	Substrate: ☐
Fused Silica (Corning 7980)	
	Coating Specification:
R _{avg} >95% @450 - 650nm	
	Surface Quality:
20-10	

Regulatory Compliance	
	RoHS 2015:
Compliant	
	Certificate of Conformance:
View	
	Reach 247:
Compliant	

Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).


Product Details

- Precision Fused Silica Substrate
- 20-10 Surface Quality
- Low Coefficient of Thermal Expansion

TECHSPEC® $\lambda/20$ First Surface Mirrors are polished to industry leading surface accuracy and quality specifications to minimize reflected wavefront error. These mirrors feature a precision fused silica substrate with a low coefficient of thermal expansion. Multiple coating options are available, allowing these mirrors to be integrated into applications spanning the visible through infrared spectra. TECHSPEC® $\lambda/20$ First Surface Mirrors are ideal for beam steering and reflection applications and are available in a variety of size, thickness, and coating options.

Note: Surface flatness is measured before coating.

Technical Information

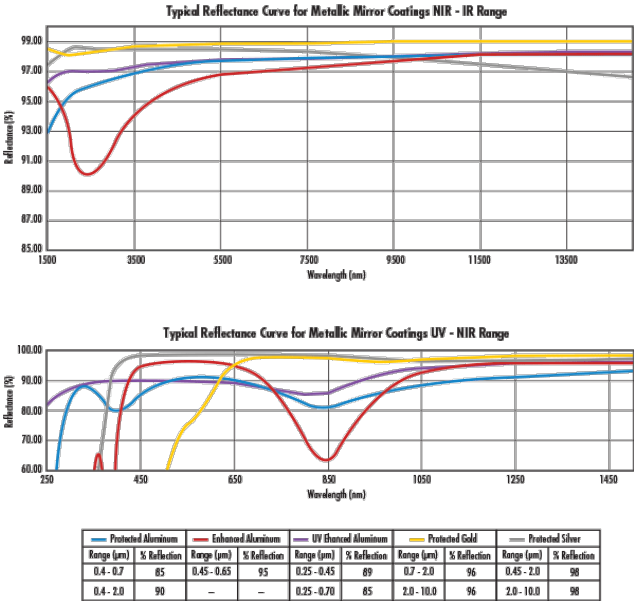

Coating Curves

Compatible Mounts

;