

**TECHSPEC® 25mm Dia x 25mm FL Acylinder Lens, MgF<sub>2</sub> Coated**



TECHSPEC Acylinder Lenses

Stock **#86-037** **3 In Stock**

⊖ 1 ⊕ C\$1,360<sup>00</sup>

**ADD TO CART**

Volume Pricing	
Qty 1-5	C\$1,360.80 each
Qty 6-25	C\$1,085.00 each
Qty 26-49	C\$1,001.00 each
Need More?	<a href="#">Request Quote</a>

Product Downloads

**General**

Acylinder Lens **Type:**

**Physical & Mechanical Properties**

25.00 +0.0/-0.1 **Diameter (mm):**

8.00 **Center Thickness CT (mm):**

Center Thickness Tolerance (mm):

±0.1

Clear Aperture (%):

90.00

Edge Thickness ET (mm):

3.1

## Optical Properties

Effective Focal Length EFL (mm):

25.00

Substrate:

N-SF5

f/#:

1.00

Numerical Aperture NA:

0.50

Coating:

MgF<sub>2</sub> (400-700nm)

Wavelength Range (nm):

400 - 700

Back Focal Length BFL (mm):

20.2

Coating Specification:

R<sub>avg</sub> ≤ 1.75% @ 400 - 700nm

Focal Length Specification Wavelength (nm):

587.6

Surface Accuracy, RMS (μm):

1.0

Surface Quality:

60-40

## Regulatory Compliance

RoHS 2015:

Compliant

Certificate of Conformance:

[View](#)

Reach 235:

Compliant


## Product Details

- Diffraction Limited Design
- Ideal for Creating Thin Line Profiles of Monochromatic Light Sources
- Focus Light in Single Dimension

TECHSPEC® Acylinder Lenses are similar to aspheric lenses in that they provide diffraction-limited focusing performance in only one dimension. By reducing spherical aberration along the focusing axis, TECHSPEC® Acylinder Lenses are ideal for creating thin line profiles. Compared to standard cylinder lenses, TECHSPEC® Acylinder Lenses also dramatically reduce the spot size of monochromatic light sources to provide sharp, thin lines.

**LASER OPTICS** MADE BY EDMUND OPTICS® [LEARN MORE](#)

## Technical Information

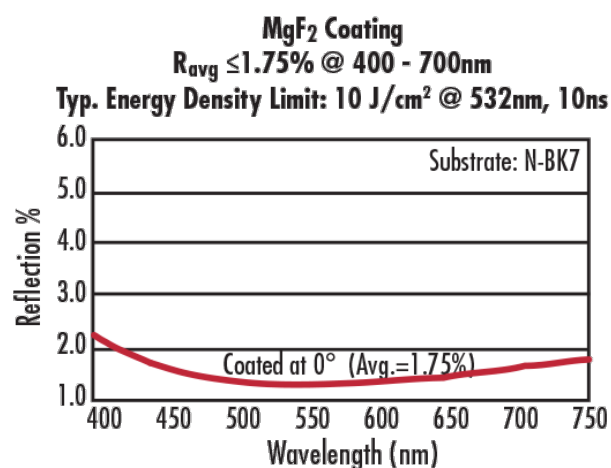

## Coating Curves

