


# Microlens Array 10 x 10mm, 500µm Pitch, 1.2° Divergence



Microlens Arrays

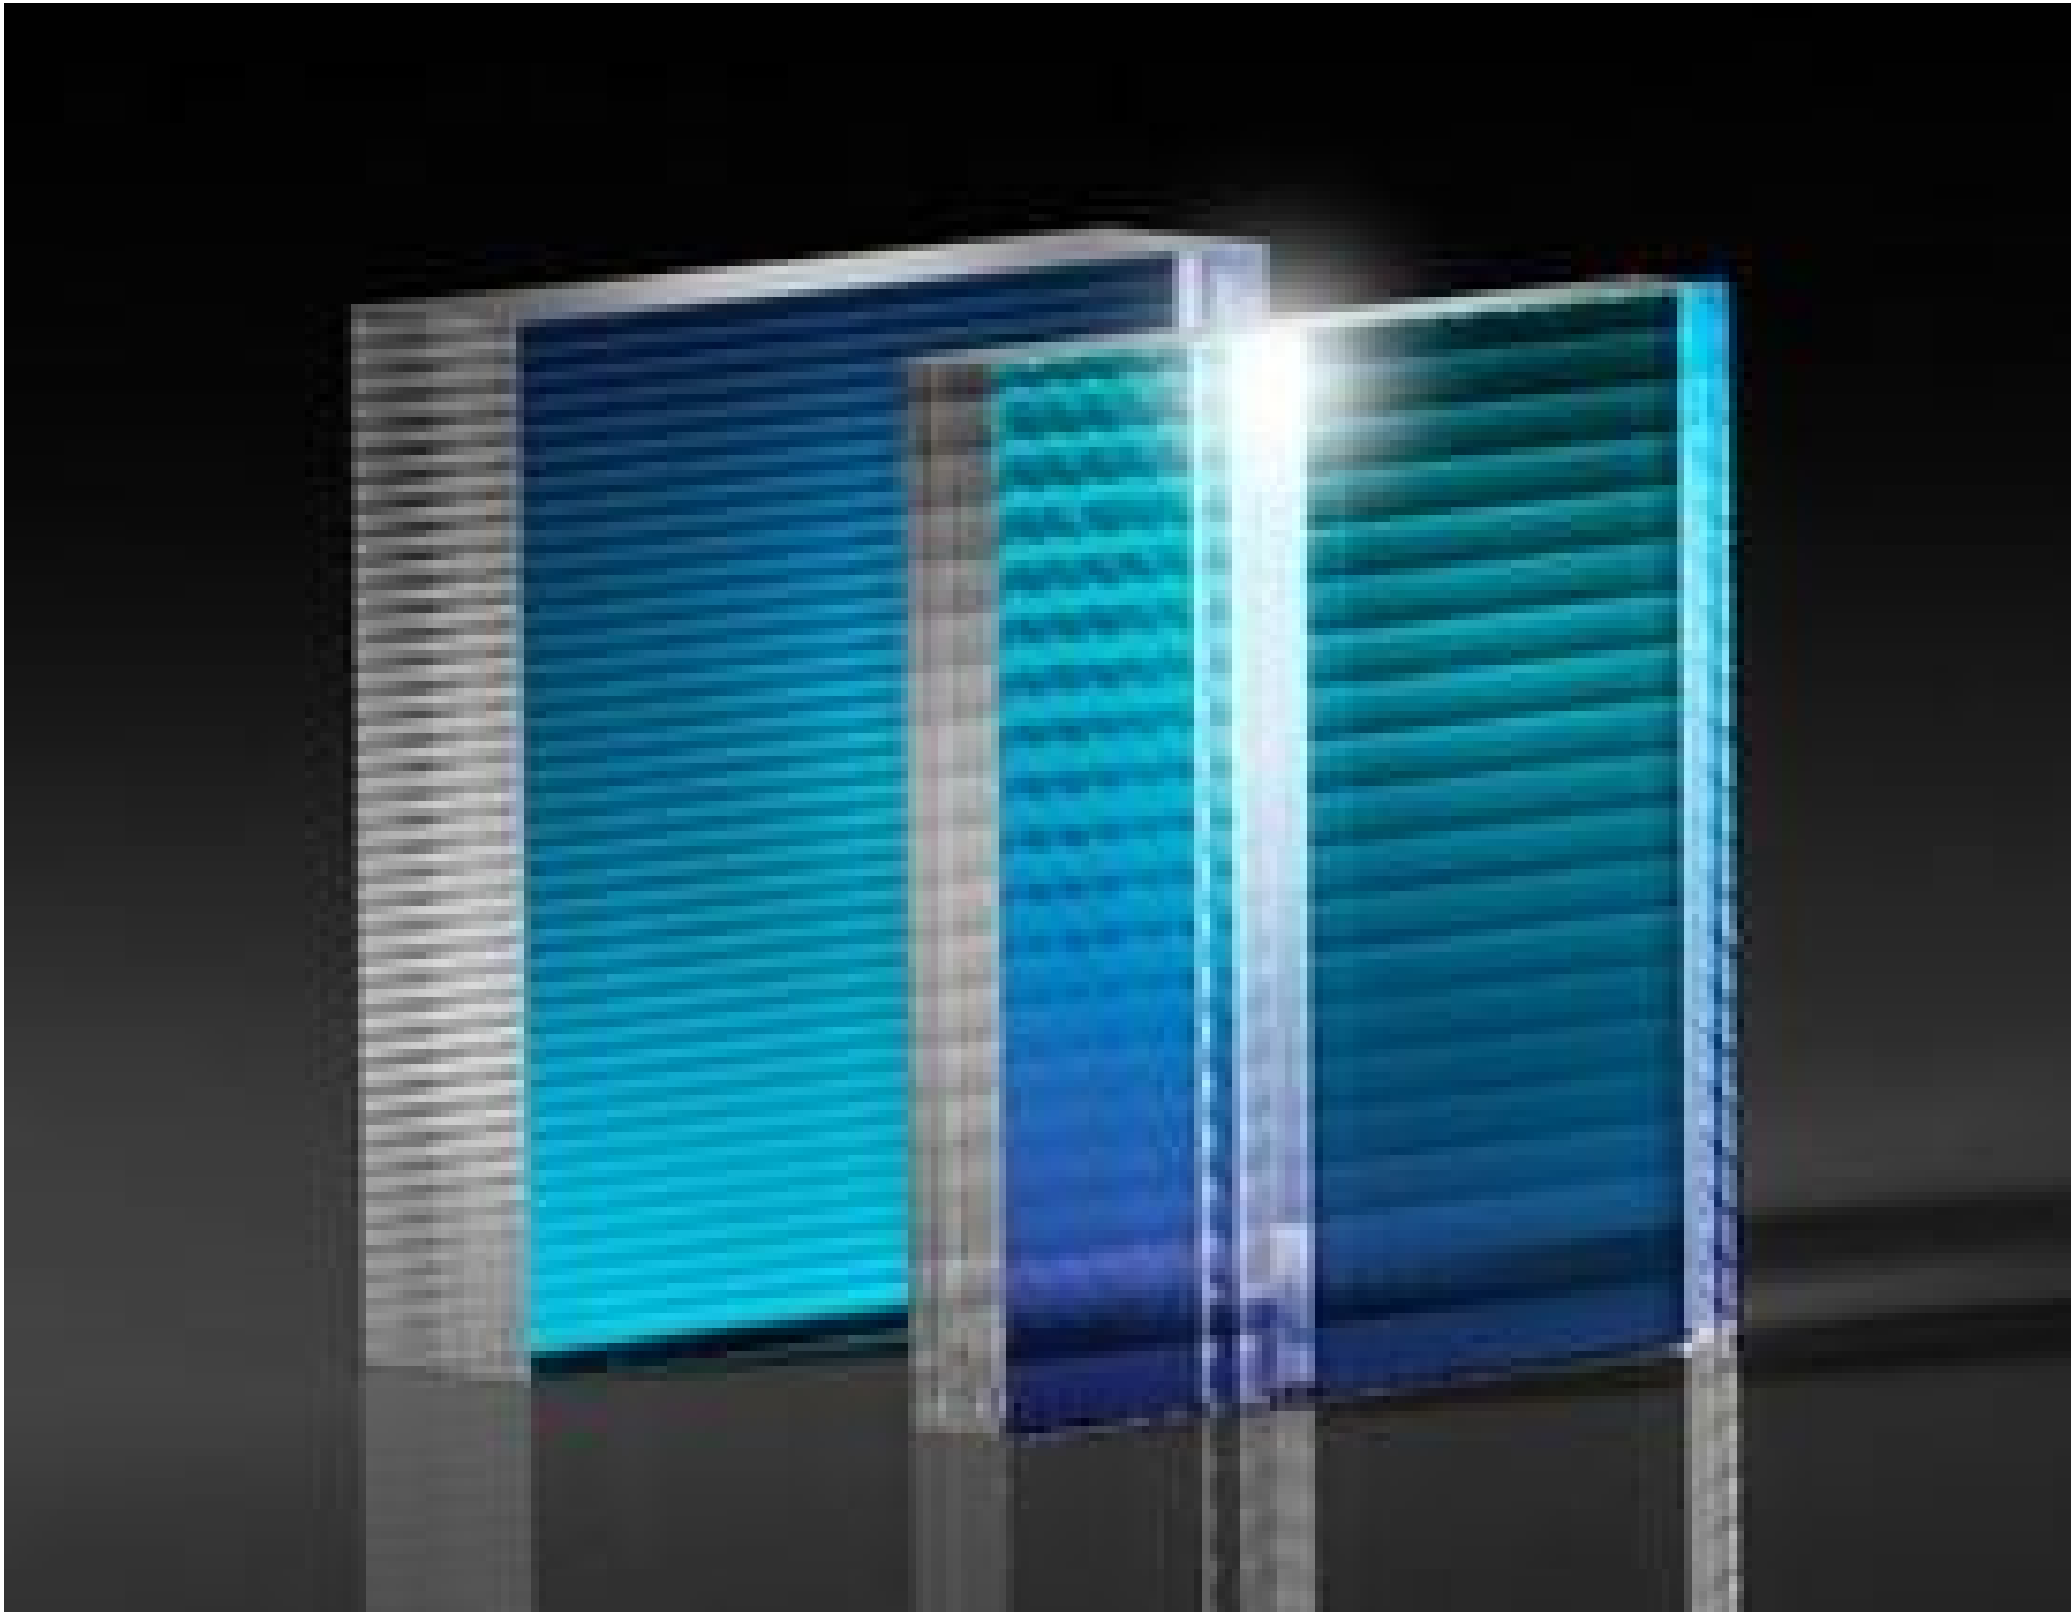

Stock **#64-479** **5 In Stock**

-

1

+

C\$1,281<sup>.00</sup>

ADD TO CART

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-10       | C\$1,281.00 each              |
| Qty 11-25      | C\$1,127.00 each              |
| Qty 26-49      | C\$1,064.00 each              |
| Need More?     | <a href="#">Request Quote</a> |

Product Downloads

## SPECIFICATIONS

### General

Type:

|                                  |                                     |
|----------------------------------|-------------------------------------|
| Lens Array                       |                                     |
| Spherical                        | Lens Profile:                       |
| Plano-Convex                     | Type of Optics:                     |
| 0.99                             | Fill Factor:                        |
| Physical & Mechanical Properties |                                     |
| 9.00 x 9.00                      | Clear Aperture CA (mm):             |
| ±0.05                            | Dimensional Tolerance (mm):         |
| 10.0 x 10.0                      | Dimensions (mm):                    |
| 6.30                             | Radius R (mm):                      |
| 1.20 ±0.05                       | Thickness (mm):                     |
| Optical Properties               |                                     |
| 13.80                            | Effective Focal Length EFL (mm):    |
| Fused Silica (Corning 7980)      | Substrate: <input type="checkbox"/> |
| Uncoated                         | Coating:                            |
| 200 - 2200                       | Wavelength Range (nm):              |
| ±1.2                             | Divergence Angle (°):               |
| 500.00 ±0.25                     | Pitch (µm):                         |
| Regulatory Compliance            |                                     |
| Compliant                        | RoHS 2015:                          |
| View                             | Certificate of Conformance:         |
| Compliant                        | Reach 240:                          |

## PRODUCT DETAILS

- Square Lens and Fly's Eye Configurations
- Precision Fused Silica Substrates


Micro lens arrays are useful for homogenizing a variety of modern light emitters from line-narrowed excimer lasers to high power LEDs. Micro lenses are well suited for applications that require high efficiency and non-gaussian uniformity. All micro lens arrays are constructed from UV-grade fused silica, offering exceptional performance from 200nm to 2.5µm. The micro lens arrays are manufactured using standard semiconductor technologies, yielding very accurate shaping of the lens profile and precise positioning of the lenses within an array. We offer our arrays in two configurations:

### Square Micro lens Arrays

Our square arrays are available in a standard 10mm x 10mm configuration in a variety of lens pitch and focal length options. Square micro lenses are commonly used for beam homogenization and shaping, yielding spot patterns or a square flat-top pattern. The lenses feature a high fill factor which eliminates zero-order hot spots in the illuminated field. Square lenses are often used in pairs, in conjunction with a PCX lens (see above). Typical applications include welding, drilling, laser ablation, and fiber coupling.

### Fly's Eye Condenser Arrays

Our fly's eye condensers arrays are available in 5 and 10mm square configurations, and are designed for flat-top and line generation. The condenser arrays are a monolithic assembly of dual-surface cylindrical micro lenses, creating condensers which are completely free of adjustment. These micro lenses are commonly used in applications requiring a large illuminated field with a short working distance, such as medical laser use, solar simulation, UV-curing, semiconductor instrumentation and fluorescence microscopy.

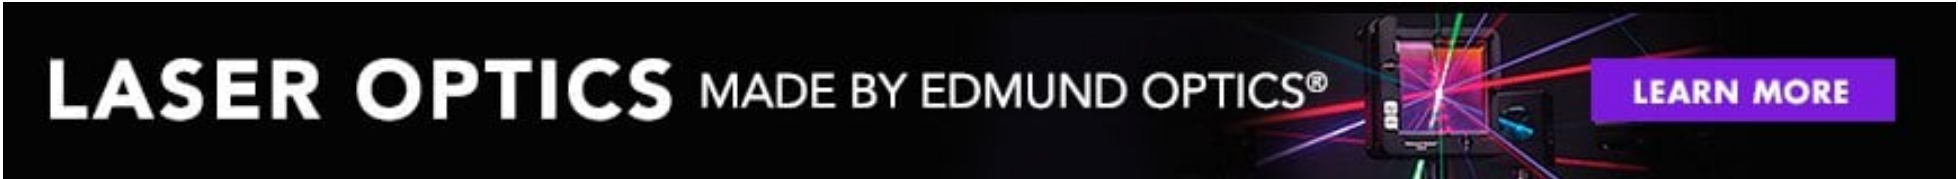

## TECHNICAL INFORMATION

