


[See all 2 Products in Family](#)

AURORA 40-85eV (15 - 31nm) XUV Phase Retarder

See More by [UltraFast Innovations \(UFI\)](#)

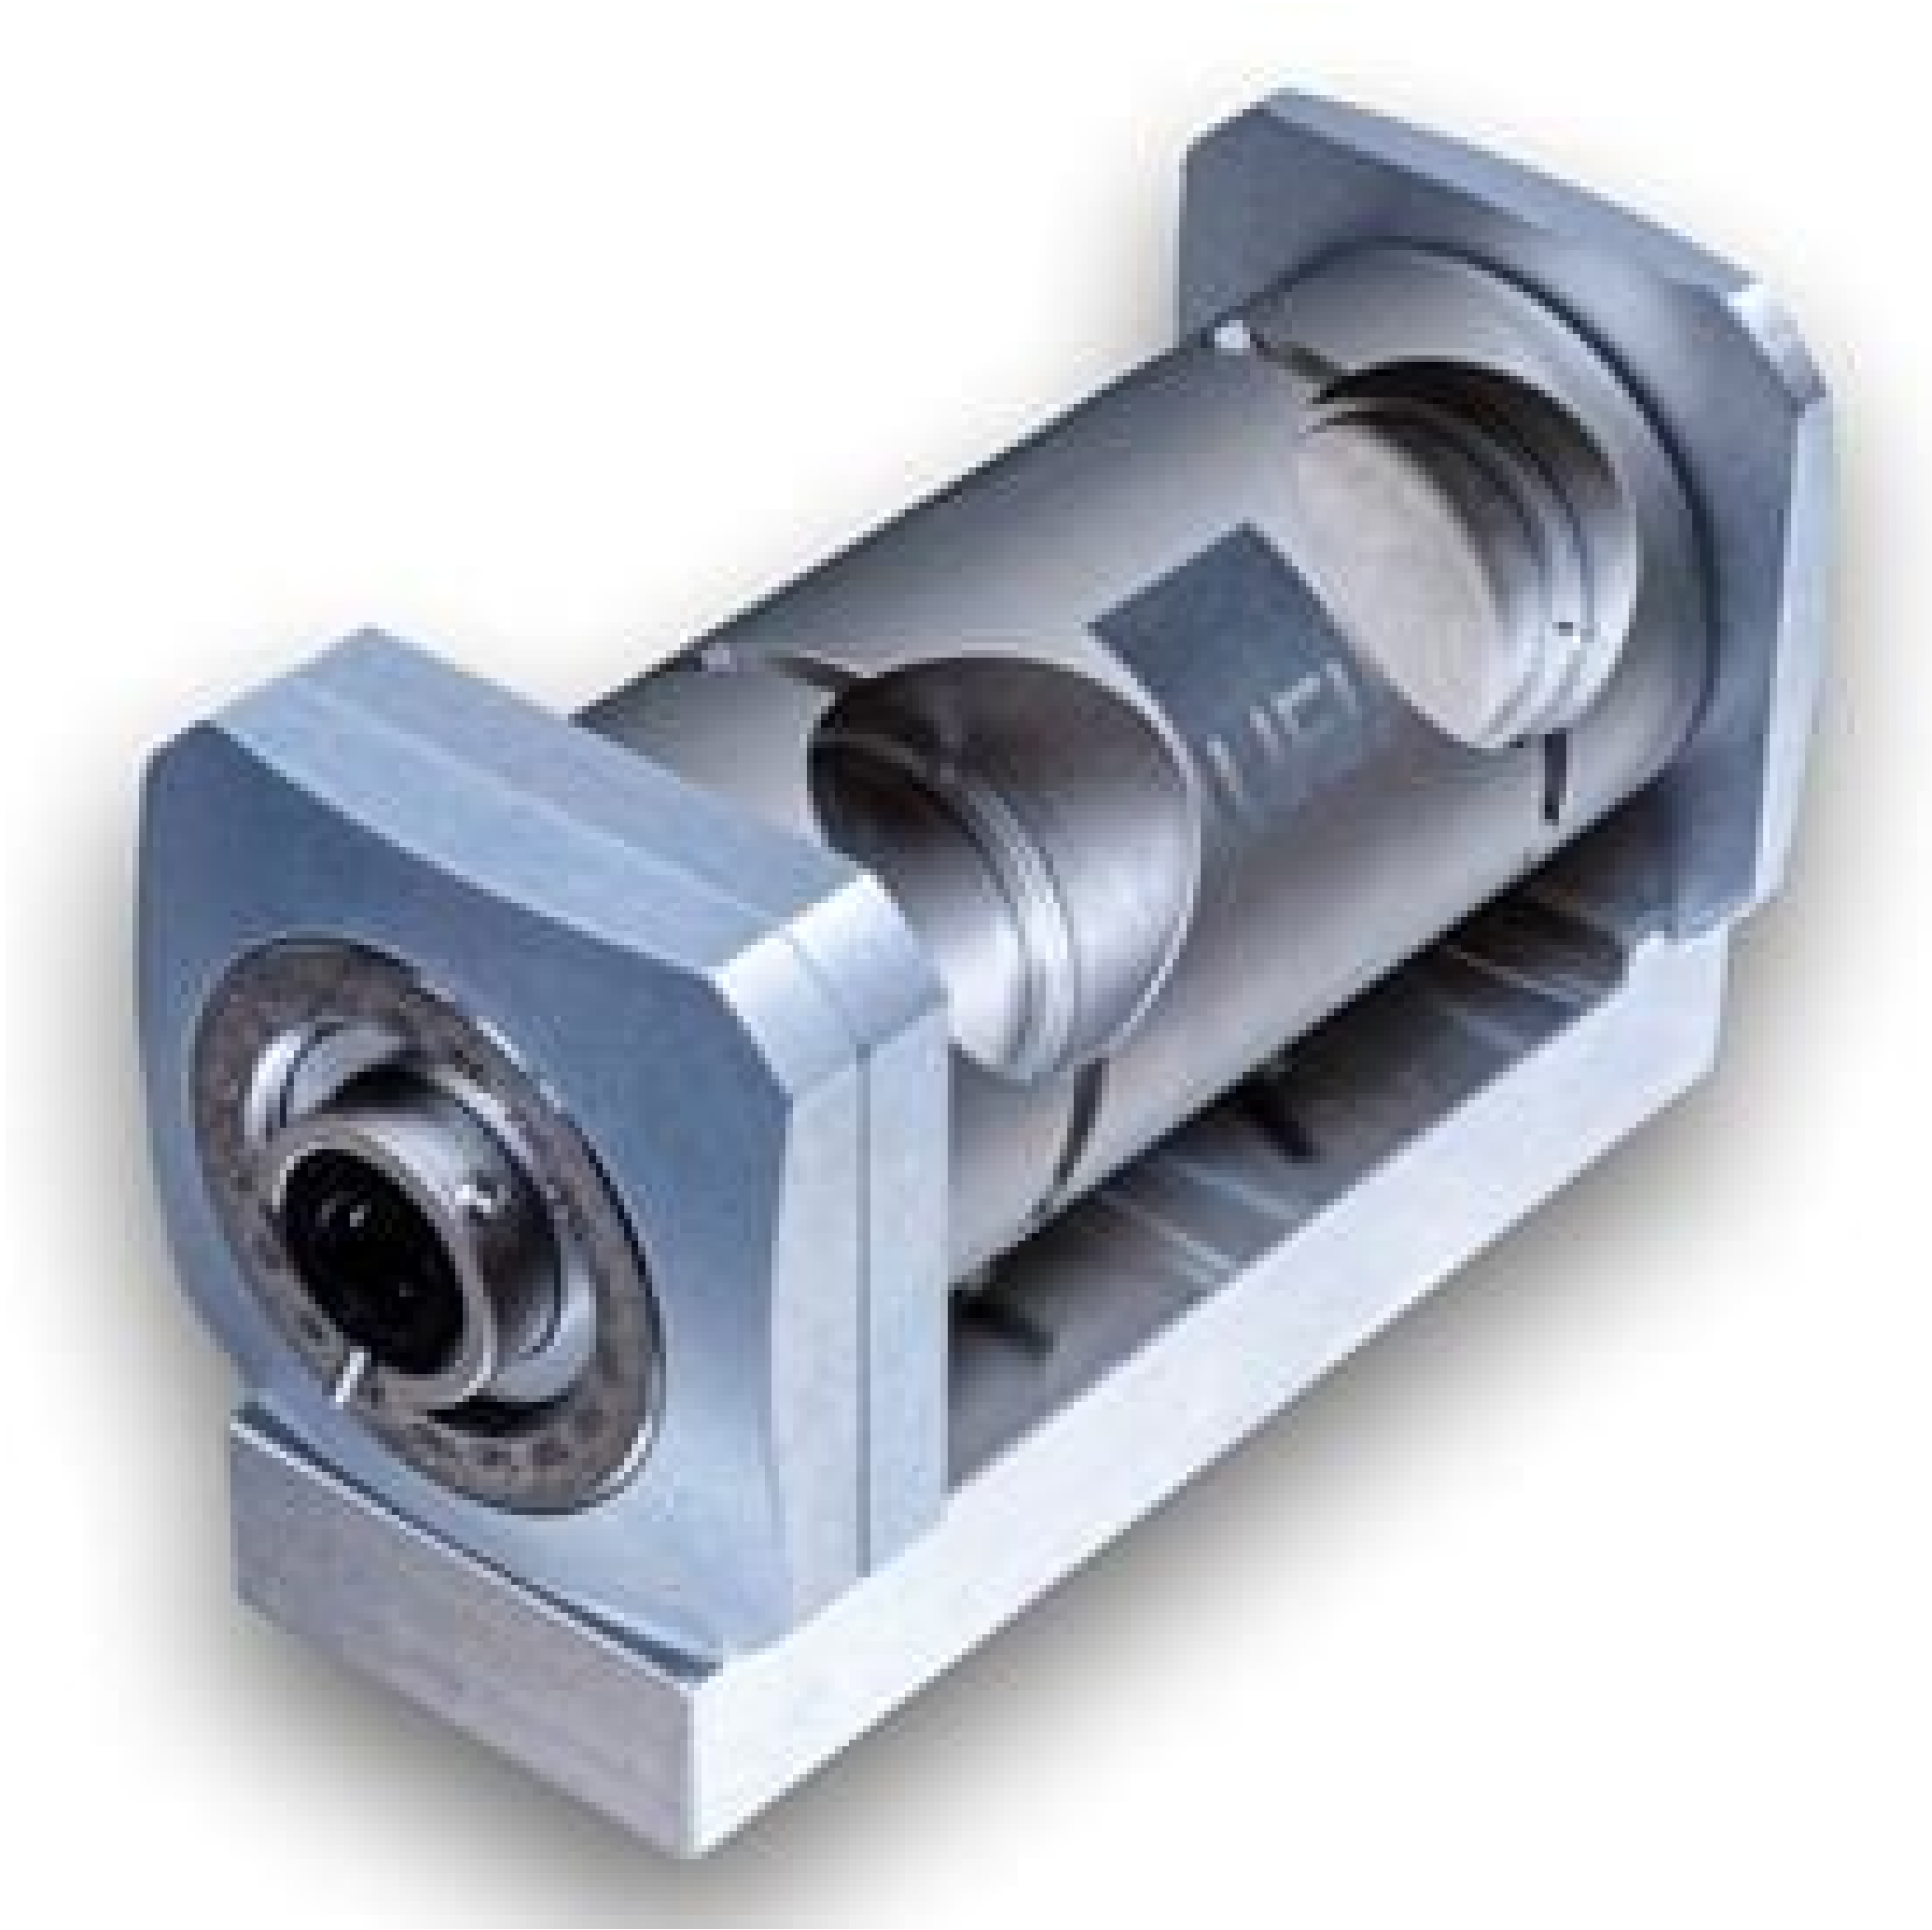

Stock #75-231 NEW CONTACT US

-

1

+

C\$51,408^{.00}

ADD TO CART

Volume Pricing	
Qty 1+	C\$51,408.00 each
Need More?	Request Quote

Product Downloads

Capacity (PC): 0.85 @ 23.4nm (Fe) 0.75 @ 18.79 (Ni)	
General	
Note: Included with the Unit 9-pin D-Sub connector DN40CF window for vacuum chamber integration	
Physical & Mechanical Properties	
51 x 118	Dimensions (mm):
3	Clear Aperture CA (mm):
Optical Properties	
>25	Transmission (%):
14.58 - 30.99	Wavelength Range (nm):
3	Extra Beam Path (mm):
Electrical	
40 - 85	Bandwidth (eV):
Regulatory Compliance	
View	Certificate of Conformance:

Product Details

- Near Circular Polarization of Extreme UV (XUV) Light without Adding Dispersion
- Up to 40% Max Transmission
- Spectral Range Options of 40 – 85 eV (15 - 31nm) or 10 – 35 eV (31 - 124nm)

UltraFast Innovations (UFI) Aurora XUV Phase Retarders are designed to act as a quarter waveplate to turn linearly polarized XUV light into circularly polarized light without introducing additional dispersion. These phase retarders achieve close to-circular polarization of PC = 0.75 and feature a > 25% transmission around 66 eV photon energy, at the Ni M2/M3 edge. Broad bandwidth options of 40 – 85eV (15 - 31nm) or 10 – 35eV (31 - 124nm) are available and a clear aperture of 3mm will allow the low divergent XUV light to pass through without clipping. UltraFast Innovations (UFI) Aurora XUV Phase Retarders use a transmission optimized, four mirror-grazing incidence reflection geometry that induces a quarter wave phase offset between the s- and p-polarization components of a linearly polarized input XUV beam. These retarders are ideal for XUV ultrafast high-harmonic, laser-based pump probe, and attosecond applications.

Note: Please contact Edmund Optics after placing your order (or prior to ordering) to provide:

- Required cable length between AURORA and the vacuum flange (include units)
- Country of operation / end-use country (required to supply the correct cable type)