


SI Variable Gain Photoreceiver, 320-1000nm

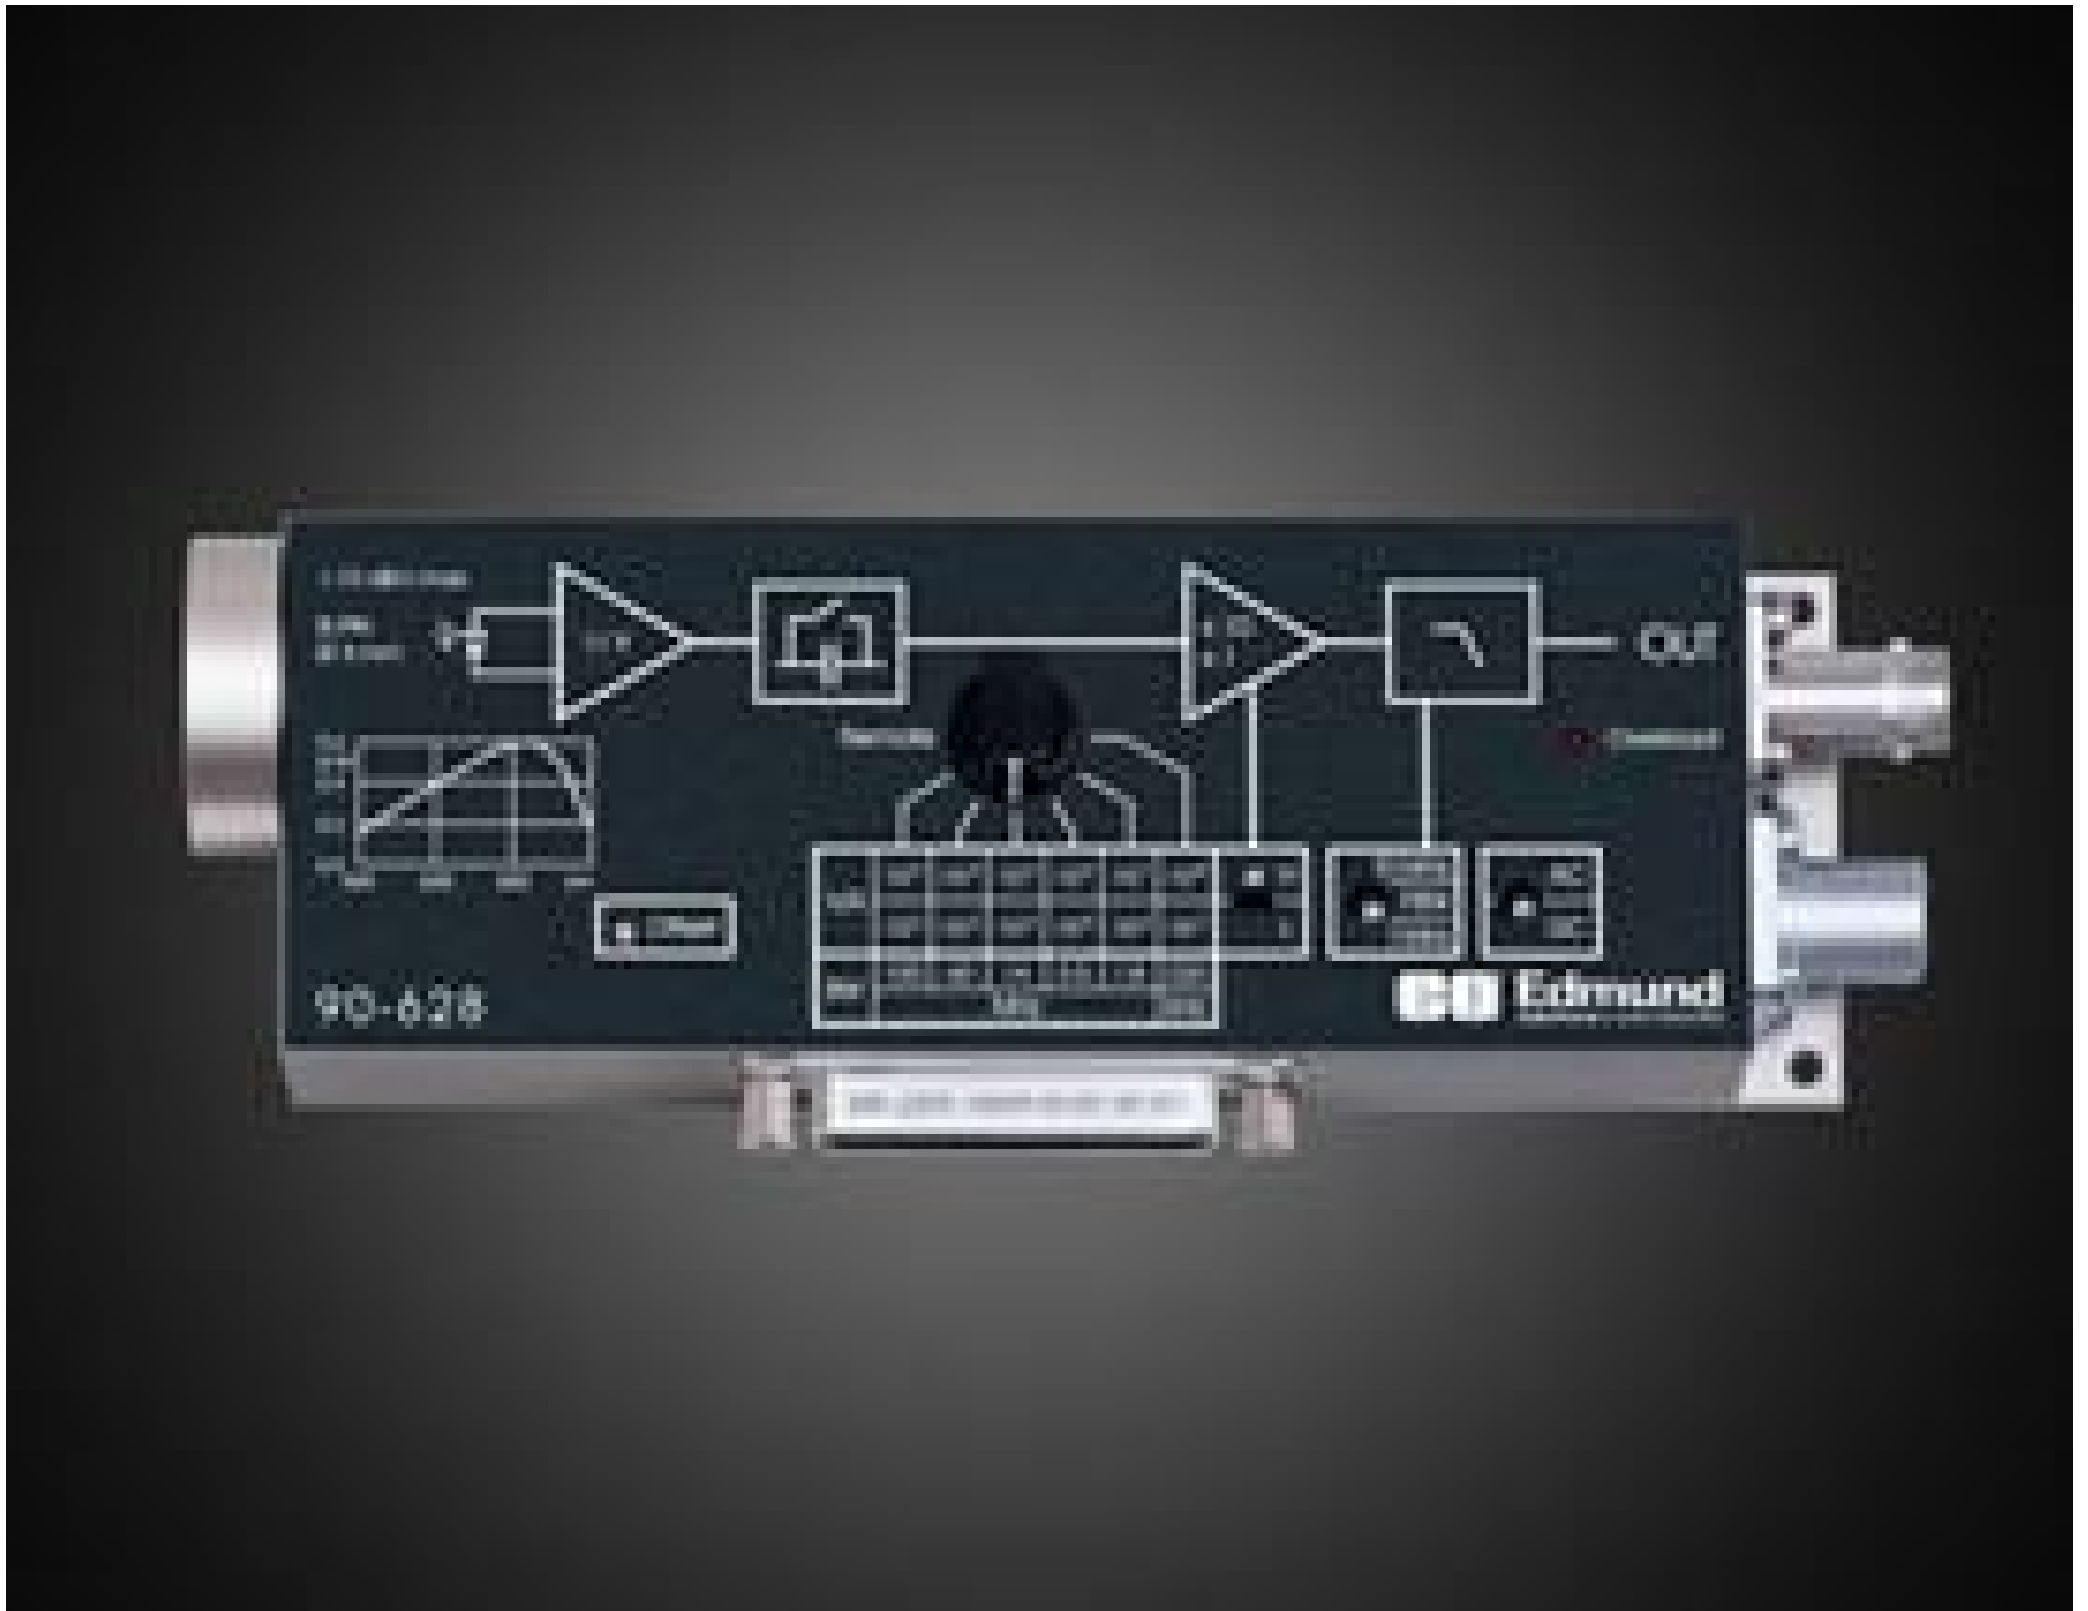

Stock **#90-628** NEW CONTACT US

-
1
+
C\$6,330⁰⁰

ADD TO CART

Volume Pricing

Qty 1+	C\$6,330.00 each
Need More?	Request Quote

Product Downloads

General

Remote Control:
Yes

Note:
Includes:
LEMO® 3-pin connector
Datasheet

Physical & Mechanical Properties

Weight (g):
320

Dimensions (mm):
Case Size: 170 x60 x45

Optical Properties

320 - 1000 nm **Spectral Range:**

Sensor

Si-PIN **Detector Type:**

Electrical

Transimpedance Gain (Ω):
Low Noise: $1 \times 10^3 - 1 \times 10^9$ (adjustable in decade steps)
High Speed: $1 \times 10^4 - 1 \times 10^9$ (adjustable in decade steps)

Noise Equivalent Power NEP ($W/Hz^{1/2}$):
 $8.1 \times 10^{-14} - 3.25 \times 10^{-10}$

200 MHz max **Bandwidth (-3 db):**

Hardware & Interface Connectivity

Power Requirement:
 $\pm 15 V, +150 mA - 100 mA, \pm 200 mA$

Power Supply:
Power Supply Required and Sold Separately.
USA: [#59-180](#)
Europe: [#59-180](#)
Japan: Not Available
Korea: Not Available
China: [#59-180](#)

Environmental & Durability Factors

0 to +60 **Operating Temperature ($^{\circ}C$):**

Regulatory Compliance

RoHS 2015:
[Compliant](#)

Certificate of Conformance:
[View](#)

Product Details

- Ultra-Wide Adjustable Transimpedance Gain from 10^2 to $10^{11} V/W$
- Exceptional Low-Noise, High-Sensitivity Single-Beam Detection
- Optimized for Absolute Optical Power Measurements
- Designed for Direct, Alignment-Free Integration

Variable Gain Photoreceivers feature an ultra-wide adjustable transimpedance gain from 10^2 to $10^{11} V/W$, enabling precise measurement of optical signals across a broad power range. Engineered for ultra-low noise performance, these photoreceivers achieve noise equivalent power (NEP) as low as $6 fW/\sqrt{Hz}$, ensuring accurate detection of extremely weak optical signals. Designed for single-beam detection, they provide maximum sensitivity and dynamic range, allowing for simple, alignment-free integration into optical systems. Variable Gain Photoreceivers are ideal for applications such as photonics research, optical communication testing, and precision low-light measurements.

Note: Power supply sold separately. Please see specifications for more details.