

[See all 23 Products in Family](#)

TECHSPEC® 15mm Dia., Enhanced Deep UV (DUV) Mirror



Precision Ultraviolet Mirrors

Stock **#18-742** **17 In Stock**

⊖ 1 ⊕ C\$450⁰⁰

ADD TO CART

Volume Pricing	
Qty 1-5	C\$450.80 each
Qty 6-25	C\$362.60 each
Qty 26-49	C\$338.80 each
Need More?	Request Quote

Product Downloads

General

Flat Mirror Type:

Physical & Mechanical Properties

15.00 +0.0/-0.2 Diameter (mm):

3.00 ±0.20 Thickness (mm):

Commercial Polish	Back Surface:
90	Clear Aperture (%):
<30	Parallelism (arcsec):
Optical Properties	
Metal	Coating Type:
Enhanced Aluminum (190-900nm)	Coating:
λ/10	Surface Flatness (P-V):
190 - 900	Wavelength Range (nm):
190	Design Wavelength DWL (nm):
Fused Silica (Corning 7980)	Substrate: <input type="checkbox"/>
0	Angle of Incidence (°):
R _{avg} ≥92% @ 190 - 250nm R _{avg} ≥83% @ 250 - 900nm	Coating Specification:
20-10	Surface Quality:

Material Properties	
10 ⁻⁷ Torr	Vacuum Compatibility:

Regulatory Compliance	
Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	REACH 241:



Product Details

- 120nm and 190nm Design Wavelengths
- Average Reflectivity >85% Across Specified Range
- Enhanced Metallic Coatings for Broadband Reflectivity through the Visible Region

TECHSPEC® Precision Ultraviolet Mirrors are ideal for most commercially available light sources and are offered in both Deep UV (DUV) and Vacuum UV (VUV) enhanced coating options. The DUV coating offers excellent reflection from 190nm to the long-wave infrared (LWIR), while the VUV coating has optimized reflection from 120nm to the LWR. These mirrors are designed for 0° angle of incidence and feature an aluminum-based coating for low polarization sensitivity. TECHSPEC® Precision Ultraviolet Mirrors have an average reflectivity of greater than 85% across a specified range. The mirrors are available in diameters ranging from 5 to 50mm.

Note: The soft coating can be easily damaged by fingerprints and aerosols.

Technical Information

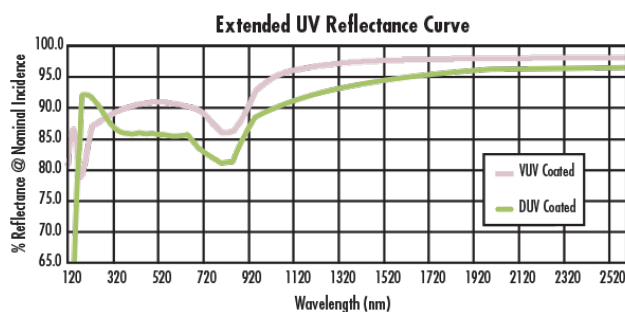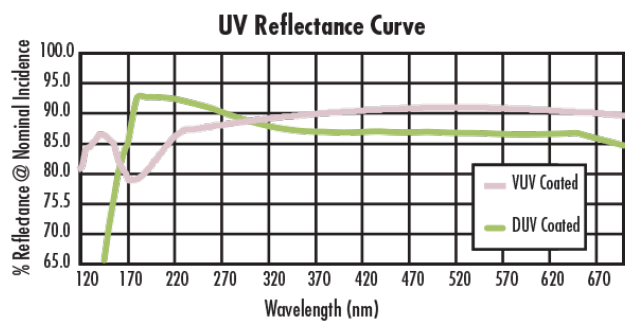



Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools

Compatible Mounts